OSG

DOCUMENT 452-86

VIDEO STANDARDS AND FORMATS

FEBRUARY 1986

OPTICAL SYSTEMS GROUP
RANGE COMMANDERS COUNCIL

WHITE SANDS MISSILE RANGE
KWAJALEIN MISSILE RANGE
YUMA PROVING GROUND

PACIFIC MISSILE TEST CENTER
NAVAL WEAPONS CENTER
ATLANTIC FLEET WEAPONS TRAINING FACILITY
NAVAL AIR TEST CENTER

EASTERN SPACE AND MISSILE CENTER
ARMAMENT DIVISION
WESTERN SPACE AND MISSILE CENTER
AIR FORCE SATELLITE CONTROL FACILITY
AIR FORCE FLIGHT TEST CENTER
AIR FORCE TACTICAL FIGHTER WEAPONS CENTER

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE *(When Data Entered)*

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER Document 452-86	2. GOVT ACCESSION NO. ADA 165934	3. RECIPIENT'S CATALOG NUMBER
4. TITLE *(and Subtitle)* "Video Standards and Formats"		5. TYPE OF REPORT & PERIOD COVERED 6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Optical Systems Group Range Commanders Council White Sands Missile Range, NM 88002		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Same as block 7.		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS Range Commanders Council ATTN: STEWS-SA-R White Sands Missile Range, NM 88002		12. REPORT DATE Feb 86 13. NUMBER OF PAGES 52
14. MONITORING AGENCY NAME & ADDRESS*(if different from Controlling Office)* Same as block 11.		15. SECURITY CLASS. *(of this report)* UNCLASSIFIED 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT *(of this Report)*

Distribution Statement A: Approved for Public Release;
Distribution Unlimited.

17. DISTRIBUTION STATEMENT *(of the abstract entered in Block 20, if different from Report)*

None

18. SUPPLEMENTARY NOTES

Supersedes Document 452-77, "Standard TV Video Formats," ADA042387.

19. KEY WORDS *(Continue on reverse side if necessary and identify by block number)*

camero output - monochrome video, picture fidelity, sync signal tolerance, data into video (DIV) encoding and decoding, left-edge data encoding standard for video systems, scan line data-into-video encoding standard, video waveform high resolution monochrome television camera, monochrome video signal, binary data, Hamming code/decode, serial data, capacity usage, amplitude and slopes

20. ABSTRACT *(Continue on reverse side if necessary and identify by block number)* (over)

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE *(When Data Entered)*

Block 19 (con.)

timing detail, data spectrum, roll-off Nyquist filter, parameters, gray scales.

DOCUMENT 452-86

VIDEO STANDARDS AND FORMATS

FEBRUARY 1986

Optical Systems Group
Range Commanders Council

Published by

Secretariat
Range Commanders Council
White Sands Missile Range,
New Mexico, 88002

TABLE OF CONTENTS

LIST OF FIGURES

LIST OF TABLES

NOTE

The definitions of television terminology formerly found in this document are contained in a separate RCC Document, **454-82, Glossary of Television Terms.**

1.0 INTRODUCTION

1.1 General

This standard is intended to clarify or augment existing standards where range applications are unique. Electrical performance standards for standard and high resolution monochrome and for color closed circuit television equipment are referred to in this document. These standards are those adopted by industry and associated professional groups which are applicable to test range use and are consistent with the rapidly developing state of the art. In addition, engineering considerations and practices used for automatic insertion of data into the video format and consequent retrieval for use are outlined.

The Army, Navy, and Air Force, including Department of Defense, Audio Visual Services, have regulations regarding television equipment and its use. The Electronic Industries Association (EIA), the Institute of Electrical and Electronic Engineers (IEEE), and the American National Standards Institute (ANSI) have published standards that are of high quality and usually adequate for technical guidance except for very specialized applications. Many of the standards are common between at least two of these groups. This publication contains a list of those available as of this document's publication date with a summary of most of them. Referral to the latest version is recommended.

1.2 Scope

The purpose of this document is to provide users of standard and high resolution monochrome and standard color closed circuit television equipment with the criteria essential for interchange and compatibility of equipment, tape recordings and live signals. These criteria are intended to apply not only to locally generated signals (that is, signals generated by the camera itself or at a nearby point where control can be exercised over picture quality), but also to ensure compatibility for metric video application, where video tape recorders, video disc recorders and data insertion equipment are used. This document is written primarily to encompass equipment which operates at a 525-line format, but does cover formats from 525 to 1023 lines with a a 60-Hz field rate and 2:1 interlace. It is understood that special requirements may necessitate the use of formats of various numbers of lines, but it is recommended that one of the following formats be selected for use if at all possible: 525, 675, 729, 875, 945, 1023. This standard is not intended to encumber industry as to method of implementation of electronic designs and should be used to augment, not negate, other standards. See figures 1-1 and 1-2 and table 1-1 for details.

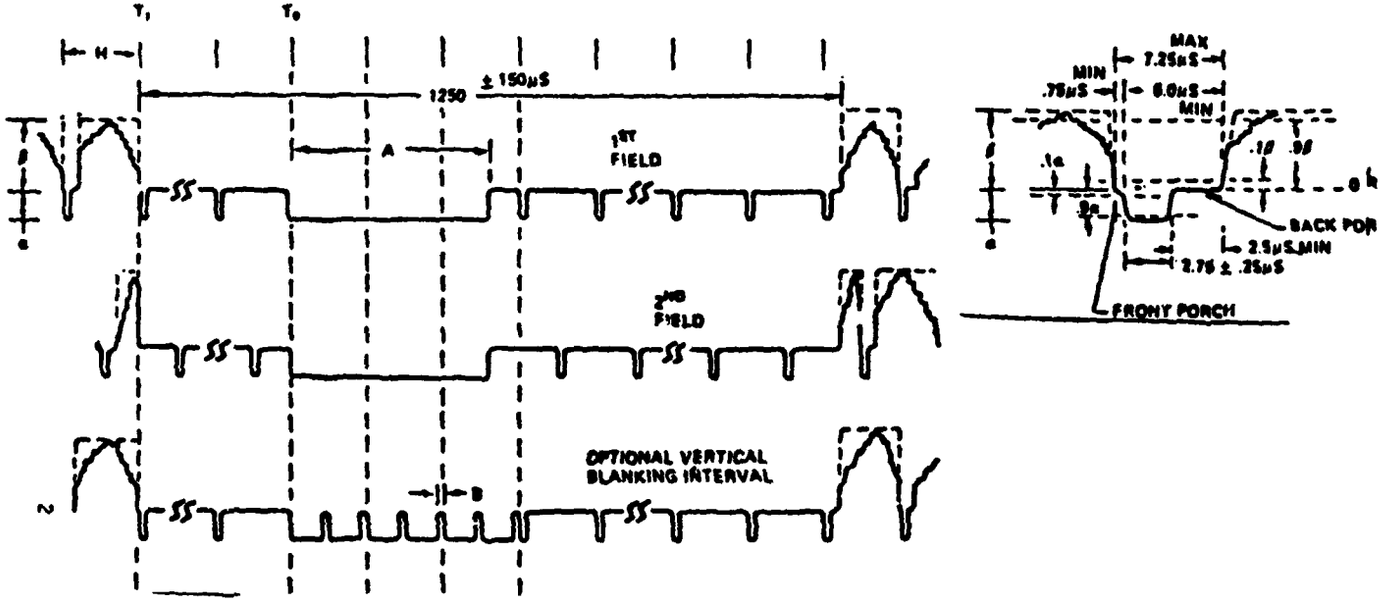

Notes:

1. $\beta = 0.714 \pm 0.1$ volts (100 IRE Units).
2. $\alpha = 0.286$ (40 IRE Units) nominal.
3. Sync to total signal ratio $\frac{\alpha}{\beta + \alpha} = 28.6 \pm 5\%$.
4. Blanking = 7.5±5 IRE Units (2.5% to 12.5% of β).
5. Horizontal Rise Times measured from 10% to 90% amplitudes shall be less than 0.1 µ/s.
6. Overshoot on horizontal blanking signal shall not exceed 0.02 β at beginning of front porch and 0.05 β at end of back porch.
7. Overshoot on sync signal shall not exceed 0.05 β.
8. T_0 = start of vertical sync pulse.
9. T_1 = start of vertical blanking.
10. $T_1 = T_0 + {}^{0}_{-250}$ µ/s
11. A - vertical sync pulse = 125±50 µ/s measured between 90% amplitude points.
12. Rise and fall times of vertical blanking and vertical sync pulse, measured from 10% to 90% amplitudes, shall be less than 5 µ/s.
13. Tilt on vertical sync pulse shall be less than 0.1α.
14. If horizontal information is provided during the vertical sync pulse it must be at 2H frequency and as shown in the optional vertical blanking interval waveform.
15. B - vertical serration = 2±.5 µ/s measured between the 90% amplitude points. Rise time measured from 10% to 90% amplitudes shall be less than 0.1 µ/s.
16. If equalizing pulses are used in the vertical blanking interval waveforms they shall be 6 in number preceding and following the vertical sync pulse, be at 2H frequency and 1/2 the width of H sync pulse.
17. It is recommended that for proper interlace the time duration between the leading edge of vertical sync and the leading edge of horizontal sync be a multiple of H/2.

Figure 1-1. Composite Video Waveform High Resolution Monochrome Television Camera.

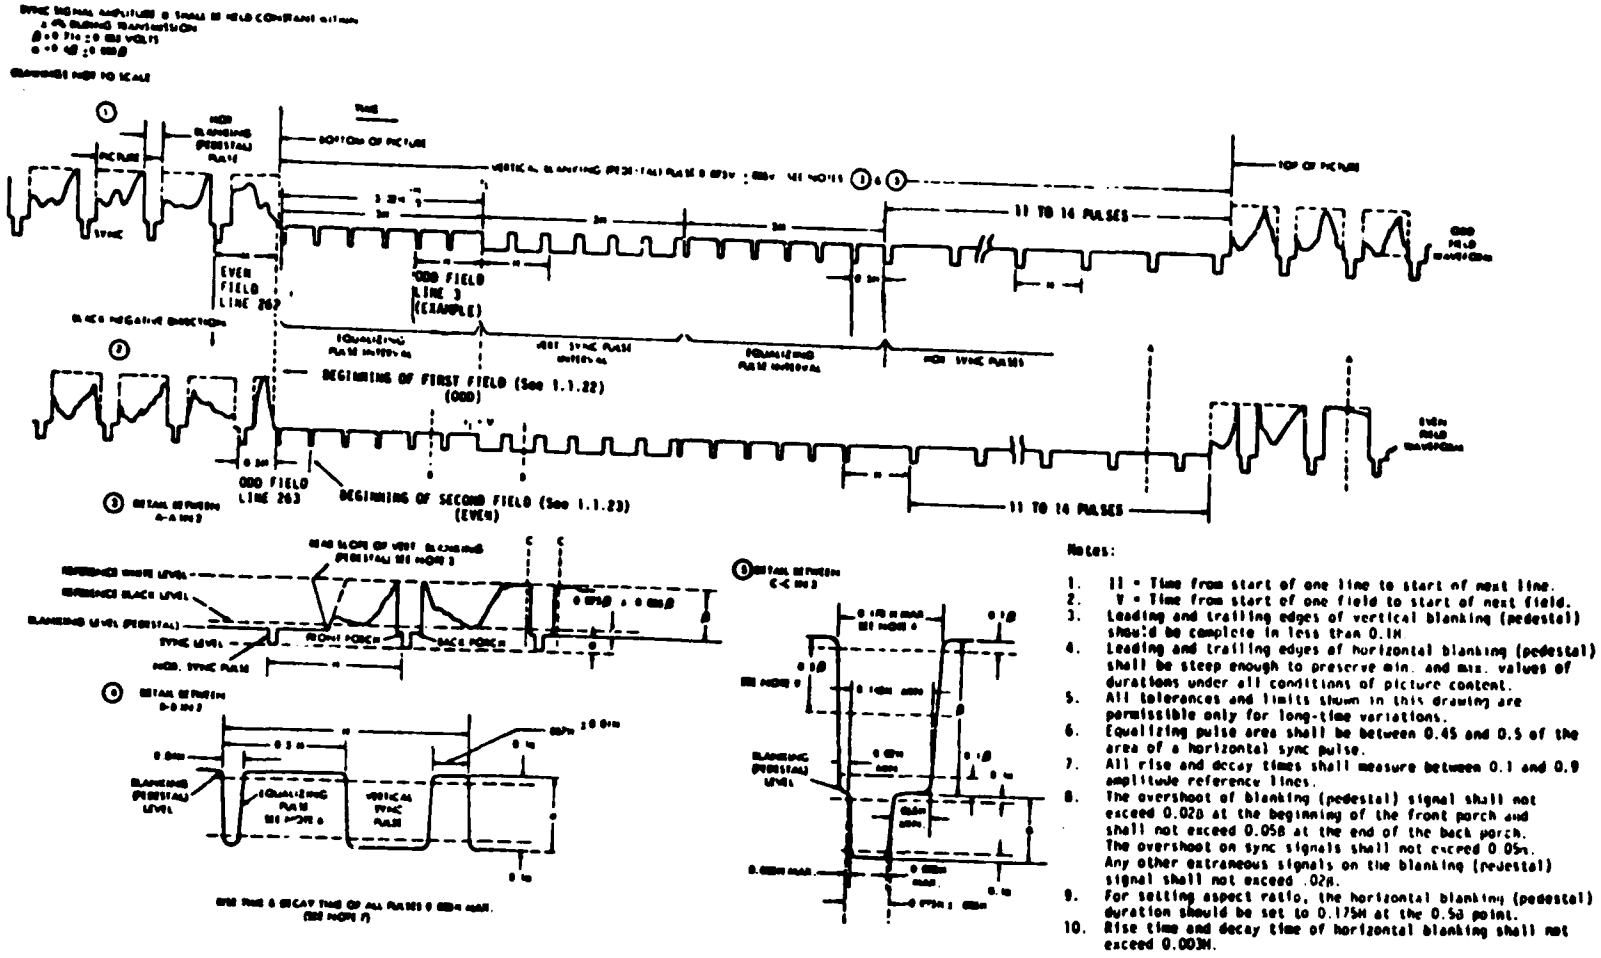

Figure 1-2. Standard Monochrome Video Signal Characteristics.

TABLE 1-1

HIGH RESOLUTION TV SYSTEM PARAMETERS

Lines/ Frame	(1) Active Lines	(2) Ver. Res Rv	(3) f_h KHz	(4) t_h µsecs	(5) t_{h_a} µsecs	Fundamental Generated Frequency (MHz)(8)							
						R_hMHz(5)		$R_h = R_v$(9)		R_h = 800 lines		R_h = 1000 lines	
						4:3(7)	1:1	4:3	1:1	4:3	1:1	4:3	1:1
675	624	425	20.25	49.38	42.38	63.6	84.8	6.69	5.01	12.6	9.44	15.7	11.8
729	674	475	21.87	45.72	38.72	58.1	77.4	8.18	6.13	13.8	10.3	17.2	12.9
875	809	575	26.25	38.09	31.09	46.6	62.2	12.3	9.25	17.2	12.9	21.4	16.1
945	874	600	28.35	35.27	28.27	42.4	56.5	14.1	10.6	18.9	14.1	23.6	17.7
1023	946	650	30.69	32.58	25.58	38.4	51.2	16.9	12.7	20.8	15.6	26.1	19.5

Vertical Blanking = 1250 µsecs nominal.

Horizontal Blanking = 7 µsecs nominal.

Notes:

(1) Active Lines = Lines/Frame less those occurring during vertical blanking.
(2) Vertical Resolution = Active Lines times Kell Factor (0.7). Vertical Resolution rounded to nearest 25 lines.
(3) f_h = Horizontal scanning frequency.
(4) t_h = Total horizontal line time.
(5) t_{h_a} = Total active horizontal line time (t_h - 7 µsecs).
(6) R_h/MHz = Lines of horizontal resolution per MHz of bandwidth.
(7) Aspect Ratio.
(8) Fundamental generated frequency required to provide indicated resolution in lines per picture height.
(9) Fundamental generated frequency required to provide horizontal resolution equal to vertical resolution.

2.0 TELEVISION REFERENCE MATERIAL AND GUIDANCE

2.1 The Television-Audio Support Activity (TASA), SEL-TVA, Sacramento Army Depot, Sacramento, California has the responsibility to design and procure administrative television and audio systems for the Department of Defense (DOD). TASA is an excellent source of information and procurement support for standard equipment and has in the past procured nonstandard equipment for Range Commanders Council (RCC) members.

2.2 DOD directives regarding television and its use are limited and contain mostly administrative guidance. They include: **DOD Directives 5100.81, 5120.20, and 5120.27.** Although television Military Standards (MIL-STDS) exist, they refer only to specific weapon systems.

2.3 Air Force and Navy publications relative to television are, in general, basic training documents and/or apply to specific systems. One exception is the Navy's **TP/5837, Transmission of Telemetry Data for Television** (NWC). Department of the Army (DA) publications other than those pertaining to specific weapon systems, are guidance oriented; for example, **AR 108-1, AR 108-6, AR 108-40, TB 108-1, TB 108-2, and TB 108-3.**

2.4 The following EIA standards have been recognized as providing the most help to RCC engineers:

a. **EIA Standard RS-170, Electrical Performance Standards - Monochrome Television Studio Facilities**, 1957. This standard outlines the signal polarity, amplitudes, and synchronization pulse format and duration which should be used for normal resolution (525 lines with 60-Hz field rate and 2:1 interlace) television. The composite picture signal provides a continuing horizontal synchronizing pulse thus facilitating the use of magnetic tape recording, magnetic disk recording, video processors, and microwave relay facilities. This standard provides or refers to standards for measuring and monitoring signal level, picture fidelity, transmission line characteristics, picture receiving power, and interference.

b. **EIA Industrial Electronics Tentative Standard N.1. and RS 170A EIA Tentative Standard, Color Television Studio Picture Line Amplifier Output Drawing.** An important part of the standard is the picture line amplifier output drawing, which defines the waveform and timing characteristics of the composite video signal at the output of a color television studio. This standard defines a four-field encoding scheme using color burst phase and horizontal-vertical relative synchronization to identify four distinct codes. Ranges may wish to deviate from this standard since it specifies a field rate of 59.94126 Hz, and a rate of 60.0 generally allows more useful synchronization to range timing systems and other range instrumentation.

c. **RS 189A, Encoded Color Bar Signal .** The EIA Standard Color Bar Signal is intended for use as a test signal for the following principal reasons: (a) adjustment of color monitors, (b) adjustment of

color encoders, and (c) rapid checks of color television transmission systems.

d. **RS-240-61, Transmitter (Broadcast) STD.**

e. **RS 250B (ANSI C16.50 - 1976), Electrical Performance Standards for Television Relay Facilities.** This standard specifies the minimum electrical performance characteristics of radio relay equipment for transmission of NTSC color television signals from a studio to its associated television broadcast transmitter or for similar applications. Pertinent parameters are defined, and standards and methods of measurement have been established for each where practical.

f. **RS-266-A-72, Television Screen STD.**

g. **RS 312A (ANSI C104.1 - 1968), Engineering Specifications Outline for Monochrome CCTV Camera Equipment.** This standard contains the recommended minimum specification formats that should be included in the published advertising items to provide the user with an quate description of the equipment.

h. **EIA Standard RS 330 - November 1966 (ANSI C104.2 - 1968), Electrical Performance Standards for Closed Circuit Television Camera 525/60 Interlaced 2:1.** This standard should not be used for instrumentation purposes. It provides incompatibility with some classes of precision tape recorders, disk recorders and video processors and reduces available options in inserting data into the vertical interval. This standard does not require a continuously recurring horizontal synchronizing pulse. With presently available single integrated circuit television waveform generators there is very little economic incentive not to use a full broadcast standard such as RS-170.

i. **EIA Standard RS 343A, Electrical Performance Standards for High Resolution Monochrome Closed Circuit Television Camera,** September 1969. This standard is written to encompass equipment which operates in the range from 675 to 1023 scanning lines with a field rate of 60 Hz. It is understood that special requirements may dictate different line numbers. It is recommended that one of the following be considered to satisfy particular requirements: 675, 729, 875, 945, or 1023 lines.

j. **RS 375A (ANSI C16.54 - 1976), Electrical Performance Standards for Direct View Monochrome Closed Circuit Television Monitors 525/60 Interlaced 2/1.** These standards are intended to apply only to Direct View Monochrome Closed Circuit Television Monitors with video input; that is, signals generated at a nearby point where control can be exercised over picture quality. They are intended to apply with a video signal as described in RS 330. (See paragraph h. above.)

k. **RS 412A (ANSI C16.57 - 1976), Electrical Performance Standards for Direct View High Resolution Monochrome Closed Circuit Television Monitors.** These standards are intended to apply only to direct view high resolution monochrome closed circuit television monitors

with a video input; that is, signals generated at a nearby point where control can be exercised over picture quality.

l. **RS 420 (ANSI C16.58 - 1976), Electrical Performance Standards for Monochrome Closed Circuit Television Cameras 525/60 Random Interlace.** This standard is intended to apply only to locally generated signals; that is, signals generated in the camera itself or at a nearby point where control can be exercised over picture quality.

m. **RS 439, Engineering Specifications Format for Color CCTV Camera Equipment.**

2.5 IEEE Publications of Interest:

a. **201-1979 (SH07302), Terms Relating to Television, Standard Definitions of.**

b. **202-1954 (SH02548) (ANSI also), Television: Methods of Measurement of Aspect Ratio and Geometric Distortion.**

c. **205-1958 (SH01248) (ANSI also), Television: Measurement of Luminance Signal Levels.**

d. **206-1960 (SH01255), Television Measurement of Differential Gain and Differential Phase.**

e. **208-1960 (SH01263), Video Techniques: Measurement of Resolution of Camera Systems.**

f. **503-1978 (SH07062), Diode-Type Camera Tubes, Standard for Measurement and Characterization of.**

g. **511-1979 (SH07575), Video Signal Transmission Measurement of Linear Waveform Distortion, Standard on.**

2.6 Other Publications:

a. National Television Systems Committee's (NTSC), **Television Standards and Practices,** (McGraw-Hill) is the NTSC standard adapted for commercial color broadcast in the United States. The term "NTSC compatibility" implies the use of standard American color television. The NTSC standard establishes the color subcarrier system to transmit color information and provides color video line, field and frame rates which are different from RS-170 monochrome.

b. Bell Laboratories, **Transmission Standards for Communications.**

c. Industrial Publications, **Television Operational Measurements-Video and RF for NTSC Systems,** Tektronix Inc., March 1976.

3.0 CAMERA OUTPUT - MONOCHROME VIDEO

3.1 Definition - Camera output terminals are defined as the junction between the camera or switching facilities and the line feeding either a transmission system or a visual display. The camera output signal is that signal which appears across the camera output terminals.

3.1.1 In this document any reference to camera output refers to the output of the camera channel whether it is a single unit or a multi-unit system.

3.1.2 The standard signal, which will be discussed below, is the signal which appears across the output terminals of the camera when they are connected to the standard load impedance.

3.1.3 The signal which appears across the line feeding either a transmission system or a visual display may be different from the standard signal. This is because the circuit may be equalized on an overall transmission basis and not with a view to keeping the input impedance of the line a specified value.

3.1.4 Under these conditions, monitoring measurements made at the output terminals of the camera must be properly interpreted.

3.2 Impedance

3.2.1 Definition - Couples ratio of voltage to current in a two-terminal network; expressed in ohms.

3.2.2 Minimum Standard - Standard load impedance of the camera output shall have a value of 75 ohms $\pm$5 percent over the frequency range of 0 to 10 MHz, and shall be connected for single-ended operation.

3.3 Direct Current in Output

Minimum Standard - Open-circuit dc voltage of the camera output shall not exceed 2 volts. The short-circuit dc current shall not exceed 2 milliamperes. These dc values are presumed to be independent of the output signal.

3.4 Polarity

Standard - The polarity of the output of the camera shall be black-negative.

3.5 Composite Picture Signal

Standard - The blanked picture signal with setup (noncomposite), as measured from blanking level to reference white level across the standard load impedance of the camera, shall be 0.714$\pm$0.1 volt (100 Institute of Radio Engineers (IRE) units).

3.5.1 The synchronizing signal as measured across the standard load impedance of the camera shall be 0.286±0.05 volts (nominally 40 ± IRE units).

3.5.2 The setup shall be 7.5±5 IRE units (2.5 percent to 12.5 percent of the blanked picture signal).

TECHNICAL NOTE

Measurement of signal levels shall be made in accordance with **58 IRE 23.S1, IRE Standards of Television: Measurement of Luminance Signal Levels,** 1958 or latest revision. This standard defines the levels of a television signal in terms of IRE units. Reference white level is +100 IRE units; Blanking level is 0 IRE units; sync level is -40 IRE units. Thus, the peak-to-peak level of a signal extending from reference white to sync tip is 140 IRE units.

4.0 PICTURE FIDELITY

4.1 Geometric Distortion

4.1.1 Minimum Standard - It shall be standard that no picture element be displaced from its true position referred to the subject by more than 2 percent of the picture height. It is desirable that the distortion be held as much below this minimum standard as conditions permit. The instantaneous apparent scanning velocity, since it is a measure of the magnification of the system, shall vary from the mean velocity in a gradual fashion. Further study may more accurately define allowable variations in the instantaneous velocity.

4.1.2 The EIA Linearity Chart contains a rectangular array of circles whose radii are 1 percent and 2 percent of picture height. The electrical pattern generator provides an array of horizontal and vertical bars or dots to match the chart. The picture channel linearity controls are adjusted until the two superimposed patterns fall within the 2 percent tolerance circles of the chart as viewed on the picture monitor. Reasonable monitor geometric distortion will have negligible effect on the accuracy of measurement.

4.2 Resolving Power

4.2.1 Minimum Standard - It shall be standard that the resolving power of the overall studio facilities be at least 350 lines in the vertical direction and 400 lines in the horizontal direction; both measurements to be made near the center of the picture.

NOTE

The resolving power of a television system or a portion thereof is a measure of its ability to delineate picture detail. It is expressed in terms of a number of lines resolved on a test chart. For a number of lines N (normally alternate black and white lines) the width of each line is 1/N times the picture height.

4.2.2 Resolution Response - In television, the ratio of (1) the peak-to-peak signal amplitude, given by a test pattern consisting of alternate black and white bars of equal width corresponding to a specified line number, to (2) the peak-to-peak signal amplitude, given by large area blacks and large area whites having the same luminance as the black and white bars in the test pattern.

4.2.3 Line Number, Television - In measuring resolution, the ratio of the frame height to the width of each bar of a test pattern composed of alternate equal-width black and white bars as projected on the frame.

4.3 Performance

The picture signal is applied to a picture monitor properly adjusted per the IEEE Standard above for the measurement of limiting resolution. (For typical system performance refer to table 1-1, page 1-5.) The limiting horizontal and vertical resolution is determined by observing the point at which the individual lines of the graduated wedges are no longer distinguishable as separately defined images. For the measurement of horizontal resolution response, the picture signal should be applied to a line selector oscilloscope having a video bandwidth equal to or greater than the specified bandwidth of the television camera and a picture monitor. The picture monitor is used to observe which line number wedge is being displayed on the oscilloscope. The oscilloscope is adjusted to view the peak-to-peak amplitude of the camera video signal corresponding to the desired line number wedge. The ratio of this amplitude to the peak-to-peak reference video signal corresponding to the horizontal black bars and the the white background is the horizontal resolution response.

4.4 Aspect Ratio

Minimum Standard - The standard aspect ratio of a frame in television shall be 4 to 3 on condition that the horizontal blanking interval be 17.5 percent of the line period and the vertical blanking interval be 7.5 percent of the frame period. No specific tolerances are assigned to this ratio, but it is understood that the tolerance allowed for geometric distortion will provide adequate limits for permissible variation in the aspect ratio.

4.5 Gray Scale

4.5.1 Definition - The ability of a camera to reproduce luminance variations in a scene. Usually expressed as the number of steps of gray discernible at the output of the camera.

4.5.2 The 10-step gray scales cover a contrast range of approximately 30 to 1. The reflectance of step #1 is determined by the reflection density of the chart material comprising the center circle. The nine-step gray scales cover a nominal contrast range of 20 to 1; step #2 having a reflectance of 60 percent and step #10 a reflectance of 3 percent. The steps are arranged in logarithmic decreasing values of reflectance such that the difference in reflection density between adjacent steps is equal to 0.16. Table 4-1 gives the reflectance and reflection density of the steps on the gray scales. The background reflectance of the outer useful area of the chart is 40 percent $\pm$5 percent.

4.5.3 Shading

Shading may be checked by visual inspection of the picture monitor to determine if the background is an even gray, and if the same number of gray steps are discernible on all four gray scales. A waveform

monitor may also be used to determine if the average picture signal axis is parallel to the black level line at both line and field frequencies.

TABLE 4-1

SPECIFICATIONS FOR GRAY SCALES

Gray Scale Number (Center Circle)	Nominal Reflectance Relative to MgO (Percent)	Nominal Reflection Density
1	>60.0	<0.22
2	60.0	0.22
3	41.7	0.38
4	28.2	0.55
5	19.5	0.71
6	13.5	0.87
7	9.3	1.03
8	6.3	1.20
9	4.4	1.36
10	3.01	1.52

4.5.4 Streaking

Streaking of horizontal black bars at the top or bottom of the large circle is an indication of low frequency phase shift or of poor dc restoration. The black bars are also very useful for adjusting the high peaking circuits which are used in camera chains to compensate for the high frequency roll off of the coupling network between the camera tube and first video amplifier.

4.5.5 Interlace

The four diagonal black lines inside the square formed by the gray scales may be used to check interlace. A jagged line indicates pairing of the interlaced lines.

4.5.6 Gray Scale Reproduction

The transfer characteristic of the camera, for given operating conditions, may be determined by using an oscilloscope with a line selector. The gray scale reproduction achieved will depend on the amount of gamma correction employed, the manner in which the camera tube is operated, and the adjustment of the picture monitor. The user will have to standardize these operating conditions if comparative subjective measurements are to be made.

4.5.7 Ringing

The two sections of sirgle line widths located in the upper right-hand portion and lower left-hand portion of the square formed by the gray scale may be used to check ringing. These lines are included because the multiple lines in the wedges are confusing for checks of this type. The lines in the upper right-hand section have widths from 350-550 (350, 400, 450, 500, 550) and the lines in the lower left-hand section have widths from 100-300 (100, 150, 200, 250, 300).

4.5.8 Signal-To-Noise

Definition - The ratio of the value of the signal to that of the noise.

Note 1

This ratio is usually in terms of peak values in the case of impulse noise and in terms of the root-mean-square (RMS) values in the case of random noise.

Note 2

Where there is a possibility of ambiquity, suitable definitions of the signal and noise should be associated with the terms as, for example: peak-signal to peak-noise ratio, RMS signal to RMS noise ratio, peak-to-peak signal to peak-to-peak noise ratio, etc.

Note 3

This ratio is often expressed in decibels.

Note 4

This ratio may be a function of the bandwidth of the transmission system.

4.5.9 Sensitivity

Definition - A factor expressing the incident illumination upon a specified scene, required to produce a specified picture signal at the output terminals of a television camera.

5.0 SYNC SIGNAL TOLERANCE

5.1 Minimum Standard - It shall be standard that the time of occurrence of the leading edge of any horizontal pulse N of any group of 20 horizontal pulses not differ from NH by more than 0.001 H, where H is the average interval between the leading edges of horizontal pulses as determined by an averaging process carried out over a period of not less than 20 or more than 100 lines.

5.2 It shall be standard that the rate of change of the frequency of recurrence of the leading edges of the horizontal sync pulses appearing in the picture line amplifier output be not greater than 0.15 percent per second, the frequency to be determined by an averaging process carried out over a period of not less than 20 or more than 100 lines; such lines not to include any portion of the vertical blanking signal.

5.3 It shall be standard that the frequency of horizontal and vertical scanning pulses not vary from the values established by the standards of frame frequency. The number of scanning lines shall not vary by more than ± 1 percent regardless of variations in frequency of the power source supplying the television station.

5.4 It shall be standard that the rate of change of frequency and the time interval between successive pulses that has been made standard for the horizontal synchronizing pulses appearing across the output of the picture line amplifier also be standard for the horizontal scanning of the pickup tube.

6.0 DATA IN VIDEO (DIV) ENCODING AND DECODING

6.1 Introduction

There is a growing use of video in instrumentation systems and control systems today. In some of these systems video is used as the primary sensor and not merely as an ancillary device. In other systems video is used in combination with transducers and other devices to form a sensing system. Usually it is desirable to time tag or otherwise correlate this data and the video images. The output of a typical sensing system then consists of a combination of video and data which is either digital or easily converted to digital. It is desirable in many if not most of these systems to merge some combination of digitized data, timing and identifiers into the video transmission format. Reasons for this are: (1) to reduce the number of transmission channels, (2) to accommodate a simple way of recording the video images and corresponding digital data on a low cost video recorder for archival purposes of transportation to a data reduction center, and (3) to facilitate a simple direct way of verifying the performance of many types of real-time image analyzers or image data extractors.

6.2 Alphanumeric Video Encoders

Alphanumeric video encoders have existed for a number of years and are in extensive use in the range community. However, they are not satisfactory for most video instrumentation systems because they require extensive manual translation of the data from the video to the data reduction equipment, and also they use up too much space on the video raster or picture area.

6.3 Data In Video (DIV) Encoders

6.3.1 The DIV systems of concern here are systems which can transfer data from the video signal to the data reduction system without human intervention. Such DIV encoder systems have been in use on various range instrumentation systems since about 1975. Although several approaches have been tried, those systems in use and on the market today employ some form of Time Division Multiplexing (TDM). This appproach is natural because of unused time periods in the composite video format. Further, these systems also employ Pulse Code Modulation (PCM) for a number of reasons. Perhaps the strongest reason is that most of the data is of digital origin and most of the data ends up going into digital systems so PCM is natural throughout. Hardware simplicity also favors this approach. The time division multiplexer has traditionally been called an encoder and the time division demultiplexer has traditionally been called a decoder.

6.3.2 To be completely suitable, a DIV system used for general test range applications must be compatible with a number of types of video equipment and processes. Such things as processing amplifiers, time base correctors, and the various types of tape and disk recorders present a number of constraints to standardization. The dominant bandwidth limiter, noise source, and signal distortion source in video

instrumention systems will be caused by the recording system. In regular playback mode, the recorder, considered as a transmission channel, differs significantly from a typical transmission channel. Video recorders introduce random noise and bandwidth limitations similar to a transmission channel, but in addition there is correlated noise, burst noise, and wow and flutter which are usually not significant or even detectable in a normal transmission channel.

6.4 Image Analysis

Most video instrumentation systems require image analysis using a Video Tape Recorder (VTR) in the pause/still mode. In the pause/still mode, the output of VTRs without time base correction is degraded more severely. Nearly all 3/4 inch U matic and 1/2 inch VHS format Video Cassette Recorders (VCRs) in pause/still mode alter the RS-170 video format. Due to the elimination of the forward motion of the tape in pause/still mode, the head-to-tape velocity is altered and the effective recorded scan line length is shortened. This format change normally eliminates one to two horizontal lines per field. Additionally, the vertical interval is usually corrupted due to synthetic sync reinsertion and guard band noise. Frequently this totally eliminates vertical interval serrations and may even blank an indeterminate number of "H" scan lines following the vertical sync period. Many of the vertical sync corruption problems eliminate any possibilities of identifying field count.

6.5 Dropout Compensation Circuits

Dropout compensation circuits located in most tape recorders can adversely affect DIV encoding. Ongoing research efforts by video tape and equipment manufacturers are seeking to totally eliminate the appearance of video dropouts due to head clogging, poor tape, environmental effects and contaminants. As technology develops more sophisticated techniques, it will become increasingly difficult to achieve high data reliability. Dropout compensation circuits may have to be bypassed on some recorders. These facts were taken into consideration when formulating DIV encoding standards.

6.6 DIV Encoding Standards

6.6.1 Introduction

The RCC OSG has elected to have two DIV encoding standards. Both encoding standards were designed to allow data decoding while a recorder is in pause/still mode and detailed analysis is being performed on the image. Of course, both standards are also completely compatible with line video or regular playback from a video recorder.

6.6.2 Left-Edge Encoding Standard

The first standard to be discussed is known as "left-edge" encoding or simply as "edge" encoding. The left-edge system is an outgrowth of the Horizontal Interval (HI) encoding system. It is called left edge because it occupies the left-most portion of the

picture area and can be seen on the left edge of a monitor. The left-edge standard is the product of work done at White Sands Missile Range (WSMR) and is sometimes referred to as the WSMR standard. Section 7 of this document defines the left-edge standard in detail.

6.6.2.1 The following improvements were made to the HI encoding system to create the left-edge system: (1) the pulse code position was moved from the back porch position of the horizontal interval to the left-edge of the picture area because use of the back porch is incompatible with several types of video equipment, (2) a 4-bit Hamming code was added to each byte of information to allow recovery from 1-bit errors during VTR playback, and (3) a start of message identifier was added. This identifier facilitates exchange of video data between ranges by providing a reference pattern on each field of video for optimizing decoding parameters. The left-edge system was selected for standardization for the following reasons:

a. It is a tried and proven technique with a large inventory of equipment in test range use. Further, it is an integral part of many systems either in use or under construction. To change from this system in most of these systems would not have been justifiable for any reason.

b. It has good noise immunity to VTR burst noise caused by dirt specks and dropouts on the video tape.

c. The encoding and decoding hardware is simple and inexpensive.

6.6.2.2 There are two aspects of left-edge encoding that limit its universal application.

a. The maximum number of information bits per video field is limited to 152. The use of Hamming error correction code and the start of message identifiers, which are necessary to achieve high data reliability with VTRs, reduces the capacity from the typical 216 bits per field of HI systems.

b. Although all known VTRs may be used to record left-edge encoding and all known recorders will support proper decoding in their regular playback mode, decoding from a recorder in the pause/still mode is more restrictive. Full message decoding cannot be done when there are noise bands or tearing (recorder dropout on consecutive video lines) in the active picture area. Good quality pause/still mode operation of the recorder used for analysis is necessary. Advancements in video tape recorder technology are eliminating noise and tearing in the pause/still mode and there is a growing number of lower cost recorders becoming available that will support pause/still mode decoding.

6.6.3 Scan Line Encoding

The second technique selected for standardizaion is called "Scan Line" (SL) encoding. Scan Line encoding is an outgrowth of "Vertical

Interval" (VI) encoding. At the time the standard was formulated, the best features of teletext encoding and other existing VI systems were combined into a consistent system. Scan Line encoding was selected for standardization because it has a high capacity of bits per video field (more than 1,000 bits per field are possible; see subparagraph 8.2, section 8), and it can be made compatible with the output of all known video recorders in their stop action or pause modes.

6.6.3.1 One major difference between SL encoding and VI encoding is that SL encoding can be located on essentially any video line (see figure 8-1, section 8) while the VI code, strictly speaking, can only be located in the vertical interval. Two things have to be considered when choosing which video lines to encode: (1) the content of the encoded lines must not be corrupted or lost by any part of the system before it is decoded, and (2) the encoded lines must not displace any essential part of the image.

6.6.3.2 The Scan Line encoding system uses the same Hamming code system as the left-edge encoding system. This provides for 1 bit of error correction per 8-bit data byte. The Scan Line encoding system is a nonreturn-to-zero binary format and the Hamming code is inserted in inverse polarity to ensure that there are always ample clock edges in the code for all possible data sets. The assurance of clock edges for all possible data sets makes the code self clocking and allows the decoding to be largely independent of horizontal sync. This in turn allows for decoding in the presence of burst noise and tearing in the near vicinity, but not over the code itself. In general, if the lines of the code haven't been corrupted by burst noise they can be decoded properly. Chapter 8 defines Scan Line encoding in detail.

6.6.3.3 Further ability to protect SL encoding from burst noise has been built into the system. Each line of code has a Longitudinal Redundancy Check Character (LRCC) at the end. This may be used to check data validity and/or to facilitate redundant encoding.

6.6.3.4 Redundant encoding will allow Scan Line encoding an increased degree of immunity from burst noise and recorder dropout compensators. (Dropout compensators affect scan line encoding more than left-edge encoding.) The LRCC provides a means of determining which of the redundant code lines to accept, that is, which code lines have a very high probability of no error. In most applications, redundancy encoding is not necessary, but Scan Line encoding is structured to facilitate its use if necessary.

6.6.3.5 Since the LRCC also provides an easy means of monitoring errors in decoding, an LRCC checker should be included in every decoder to provide quick-look assessment of performance. When the data sets are transferred into a computer system for analysis, the LRCC should be included so that it may be used along with other checks to assure that the data set transferred into the computer is error free. If redundant encoding is used, it is probably more appropriate to have the determination of valid code line data sets made in the computer rather than in the decoder.

7.0 LEFT-EDGE DATA ENCODING STANDARD FOR VIDEO SYSTEMS

7.1 Purpose

The purpose of establishing this standard is to ensure electronic compatibility among users for efficient binary encoding of data on video systems. The electrical format is necessarily separated from the data format because of the wide variety of data formats required by different users. The WSMR data format is included as a recommended data format, but is not an essential part of the encoding format. Use of the Hamming code, however, is an essential part of the standard.

7.2 Electrical Encoding Standard

7.2.1 Start-of-message line number. This is variable and is selected by the user; however, once the start-of-message line number is chosen, this value must remain fixed within ± 2 horizontal lines. The user should specify this number for each tape to facilitate decoding.

7.2.2 Horizontal interval data-bit position. There is 1 bit (sync or data) per horizontal line beginning with the start-of-message line. The bit cell center is positioned to occur 9.3 ± 0.1 microseconds after the falling edge of the horizontal sync (figure 7-1).

7.2.3 Bit cell duration. The duration of each bit is 3 ± 1 microseconds (figure 7-1).

7.2.4 Bit voltage values. Zeros are 0.25 ± 0.05 volt and ones are 0.65 ± 0.05 volt (figure 7-1).

7.3 WSMR Data Format

7.3.1 Start-of-message pattern. The message must begin with the start-of-message pattern. This pattern is $000B39_{16}$, which is $0000\ 0000\ 0000\ 1011\ 0011\ 1001_2$. The purpose of this pattern is to identify data to the decoder. This will initialize the decoding system for acceptance of valid data.

7.3.2 Error detection and correction. A Hamming code is used for error detection and correction. Four Hamming bits are combined with every 8 data bits for a total of 12 encoded bits per word. One-bit errors can be automatically detected and corrected (figures 7-2A and 7-2B). The use of the Hamming code in the standard is the only significant difference (with the exception of the data format) between the WSMR system and previous approaches to horizontal interval data encoding. This, however, is a significant change and precludes the use of earlier incompatible systems without modifications.

7.3.3 Sample rate. Sync, time, azimuth, and elevation are sampled at 60 samples per second.

7.3.4. Data capacity. There are 152 possible data bits (19 words x 8 bits of data per word), excluding sync bits, in each field. These

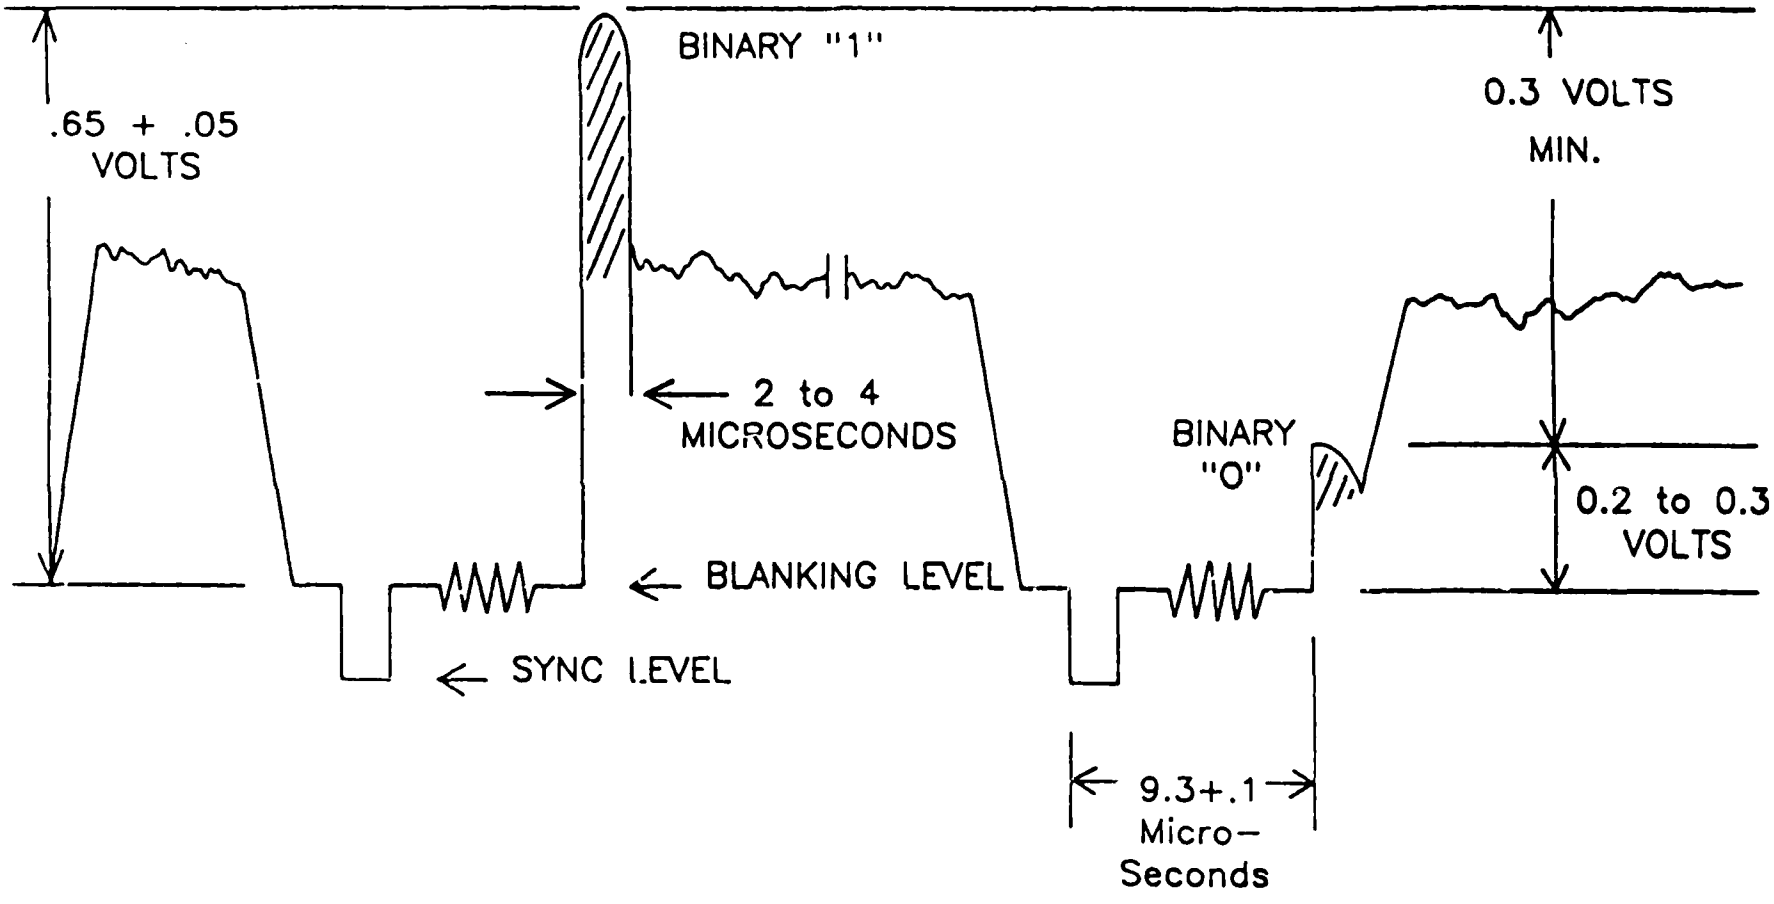

Figure 7-1. Video Signal Plus Binary Data.

FORMAT FOR EACH 12-BIT GROUP IN THE DATA BLOCK

$D_7\ D_6\ D_5\ D_4\ D_3\ D_2\ D_1\ D_\emptyset\ H_3\ H_2\ H_1\ H_\emptyset$

WHERE: D_7 is encoded first in time, then D_6, D_5, etc.

D = Data Bit

H = Normal Polarity Hamming Bit (See Polarity, figure 7-1.)

$H_\emptyset = D_\emptyset \oplus^* D_1 \oplus D_3 \oplus D_4 \oplus D_6$

$H_1 = D_\emptyset \oplus D_2 \oplus D_3 \oplus D_5 \oplus D_6$

$H_2 = D_1 \oplus D_2 \oplus D_3 \oplus D_7$

$H_3 = D_4 \oplus D_5 \oplus D_6 \oplus D_7$

EXAMPLES: Data Word 00000000 Hamming Code 0000

12-Bit Data Group Encoded as : 000000000000

Data Word 11101000 Hamming Code 1010

12-Bit Data Group Encoded as : 111010001010

* Note: $\oplus$ Represents the EXCLUSIVE OR Operation.

Figure 7-2A. Data Group Format and Hamming Code.

LET:

$$A = d_0 \oplus d_1 \oplus d_3 \oplus d_4 \oplus d_6 \oplus H_0$$

$$B = d_0 \oplus d_2 \oplus d_3 \oplus d_5 \oplus d_6 \oplus H_1$$

$$C = d_1 \oplus d_2 \oplus d_3 \oplus d_7 \oplus H_2$$

$$D = d_4 \oplus d_5 \oplus d_6 \oplus d_7 \oplus H_3$$

AND

D_n = Data Bit n Interpreted (Corrected if Necessary)

d_n = Data Bit n Transmitted (Raw)

$$D_0 = d_0 \oplus (A\ B\ \overline{C}\ \overline{D}) \qquad D_4 = d_4 \oplus (A\ \overline{B}\ \overline{C}\ D + A\ B\ C\ D)$$

$$D_1 = d_1 \oplus (A\ \overline{B}\ C) \qquad D_5 = d_5 \oplus (\overline{A}\ B\ \overline{C}\ D)$$

$$D_2 = d_2 \oplus (\overline{A}\ B\ C + B\ C\ D) \qquad D_6 = d_6 \oplus (A\ B\ \overline{C}\ D)$$

$$D_3 = d_3 \oplus (A\ B\ C\ \overline{D}) \qquad D_7 = d_7 \oplus (\overline{A}\ \overline{B}\ C\ D)$$

Figure 7-2B. Hamming Decode.

data bits are located in words 3 through 21 (figure 7-3). Note that words 19 through 21 are spares reserved for future expansion.

7.3.5 Time and pointing data resolution. The resolution of timing data is 0.1 millseconds. The resolution of the azimuth and elevation data is 0.0001 grad.

7.3.6 Field ID. Word 17 identifies the field so that station status bits can be properly identified by a video data reader.

7.3.7 Station status. Word 18 contains station status. Sixteen fields are required to provide station status (figure 7-4).

7.3.8. Hamming code format. Data and Hamming codes are formatted with the most significant digit first. It is recommended that decoding equipment be programmable to adapt to different data formats.

WORDS	1–2	3–9	10–16	17	18	19–21
FUNCTION	SYNC 000B39	TIME	AZ & EL	FIELD ID	STATUS	SPARES

DATA CAPACITY

USABLE LINES PER FIELD	252 LINES
DATA BITS PER WORD	8 BITS
HAMMING BITS PER WORD	4 BITS
WORD = DATA + HAMMING	12 BITS
WORDS PER FIELD	21 WORDS
MAX NO. OF IDENTIFIABLE FIELDS	256 FIELDS

Figure 7-3. WSMR Serial Data Format.

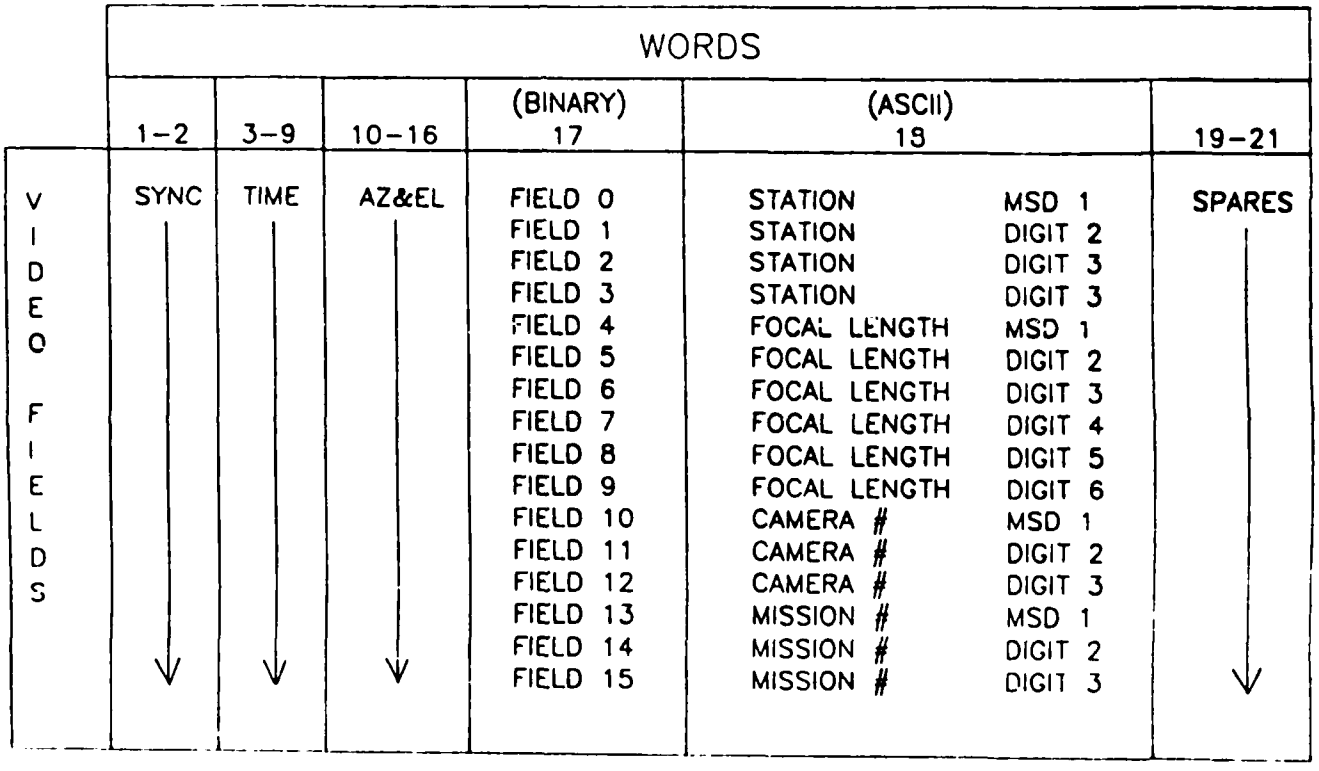

Figure 7-4. WSMR Capacity Usage.

8.0 SCAN LINE DATA-INTO-VIDEO ENCODING STANDARD

8.1 The line number of the first line of encoded data is variable but must be specified (written on the tape) within ± 1 video line for interrange or intergroup use. Data may be encoded in the vertical blanking interval outside of the vertical sync interval or on any line of video in the picture area. (See figure 8-1.)

PROCUREMENT NOTE

It is perfectly acceptable to procure encoders hardwired or prom-programmed to start encoding on a particular video line number and encode a fixed number of lines. Encoders in many cases may be built as part of the total data system. If an encoder has the possibility of being used on a variety of systems and projects over its lifetime, then it is probably wiser to buy it with flexibility in encoded line positioning.

It is less advisable to buy decoders hardwired to look for start of message on a particular line number plus or minus a few lines. Decoders will have a much greater probability of being used on a variety of systems and projects over their lifetime; therefore, decoders should probably have a means of entering the start-of-message line number via thumbwheels or a keyboard.

8.2 The number of lines of data is variable but must be specified (written on the tape) exactly to the number of lines of data for interrange or intergroup data exchange. It is suggested that users procure units with the following increments in maximum capacity:

Four Line: Up to 4 lines of data/field (that is, 288 data bits/field)

Eight Line: Up to 8 lines of data/field (that is, 576 data bits/field)

Sixteen Line: Up to 16 lines of data/field (that is, 1152 data bits/field)

8.3 Data lines must be contiguous.

8.4 Each video encoded line has the same format. The format of the encoded lines is shown in figure 8-2. There are 144 bits per encoded line. These are divided into 12 groups of 12 bits each. The first two groups are a start-of-message prefix. The next nine groups consist of data and Hamming bits, and the last group consists of a Longitudinal Redundancy Check Character (LRCC) and Hamming bits.

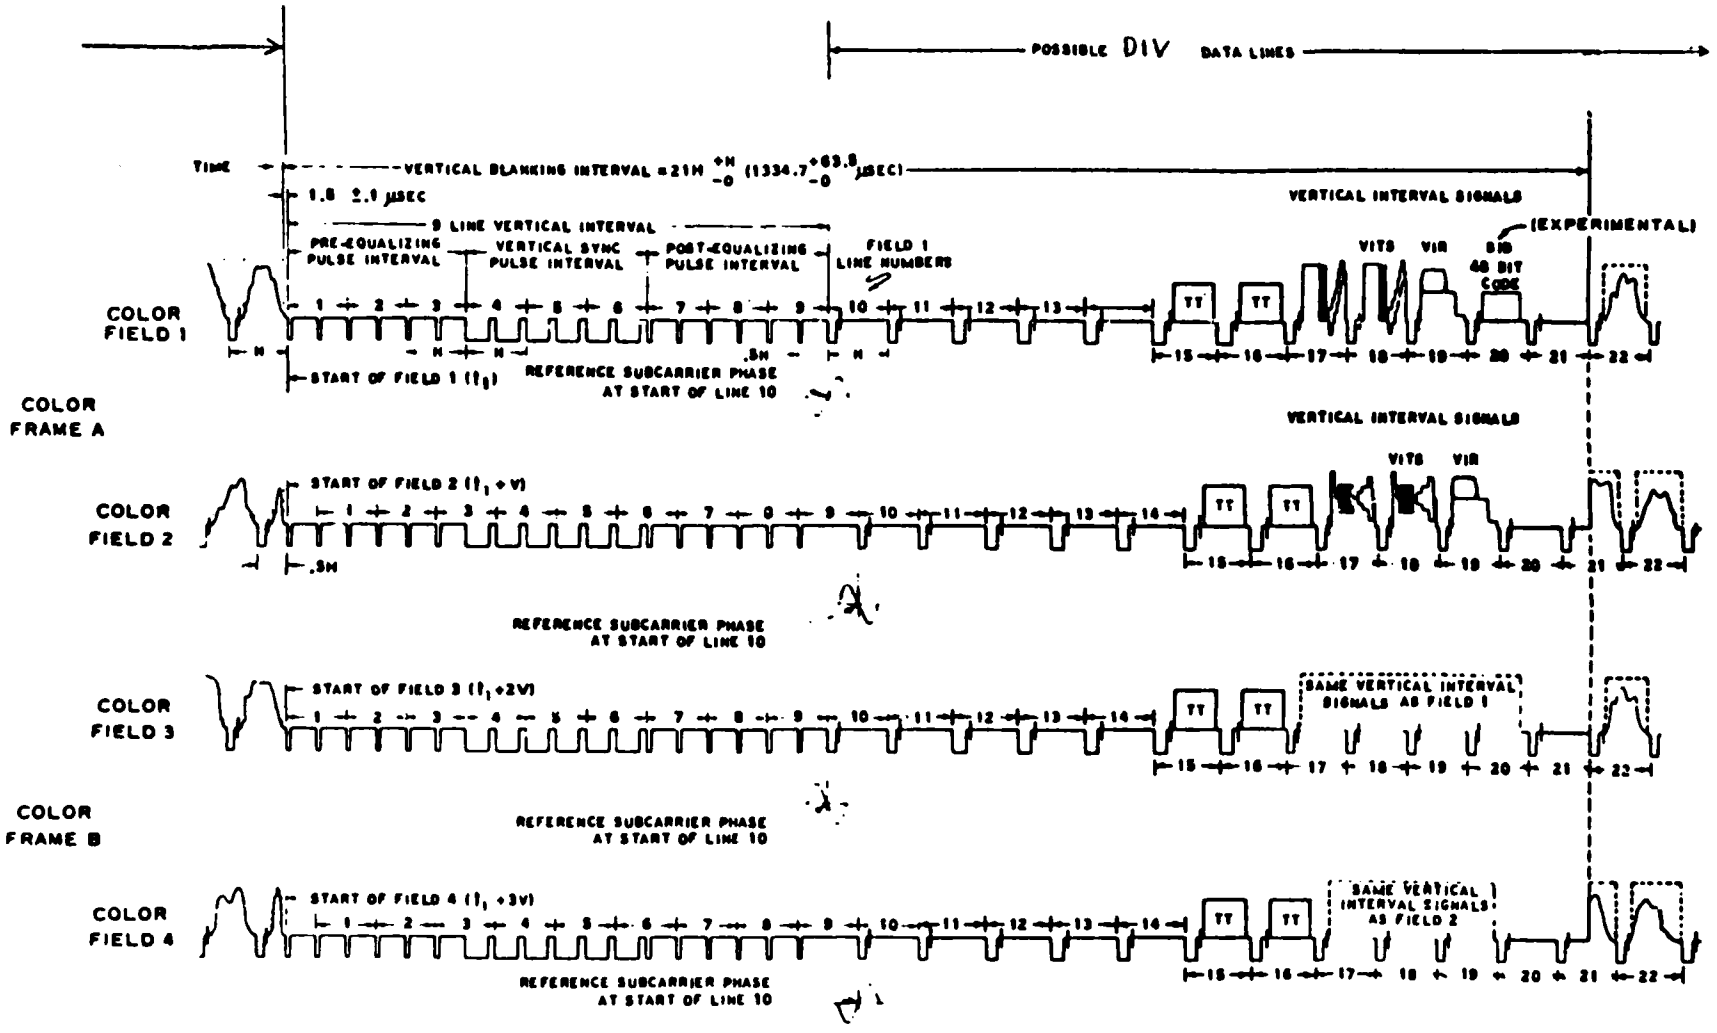

Figure 8-1. Composite Video Signal.

TT = TELETEXT

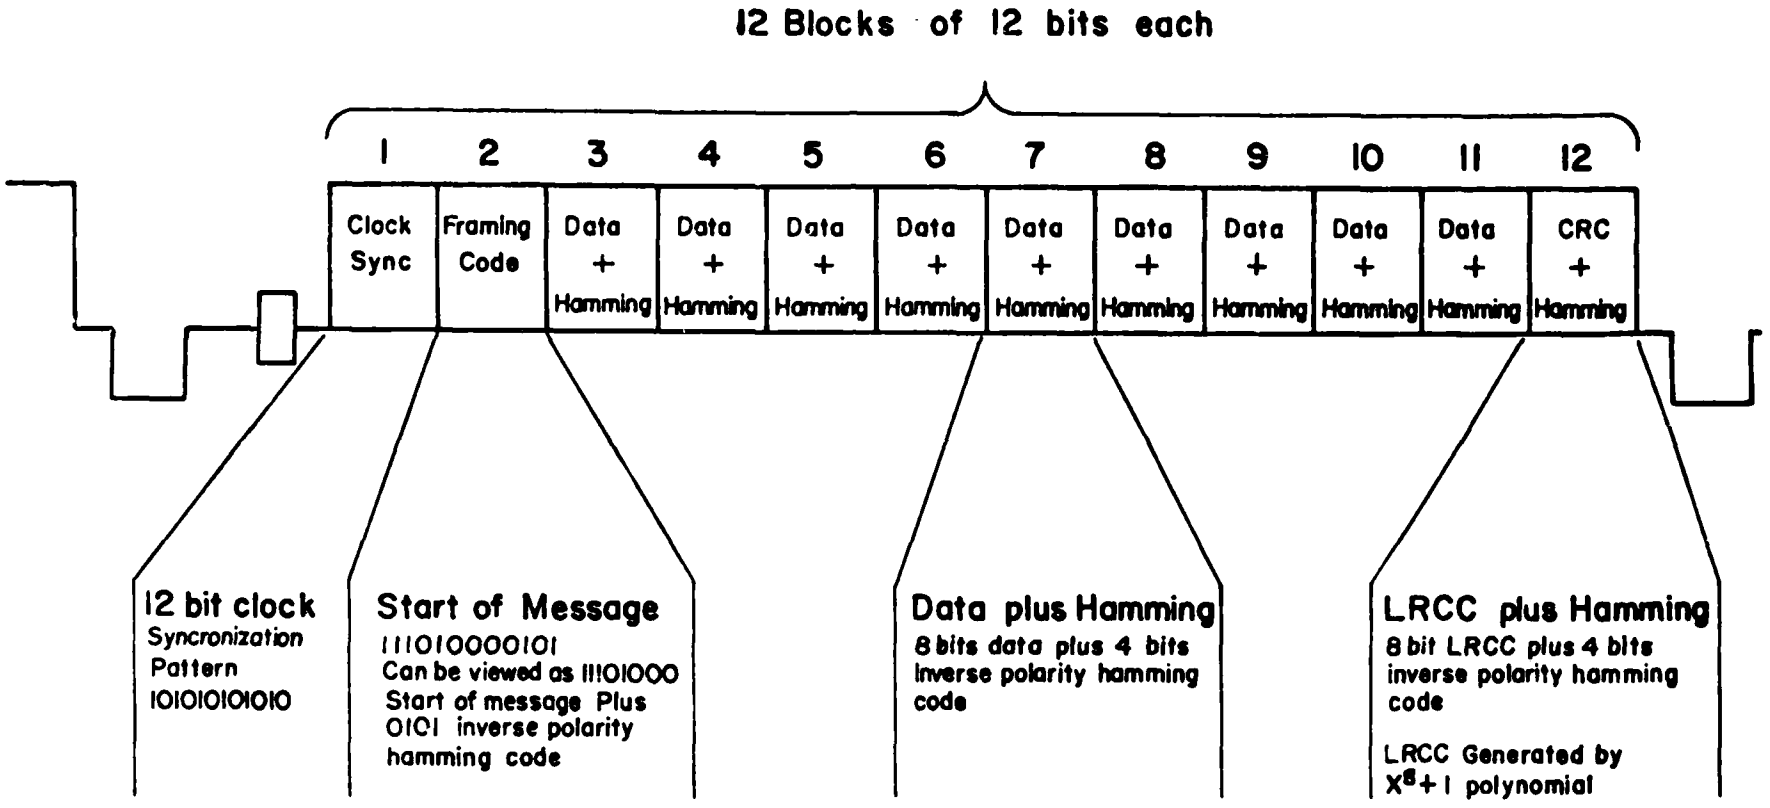

Figure 8-2. Encoded Line Format.

8.5 A data word logic high is encoded as a high in the DIV format (see figure 8-3). A data word logic low is encoded as a low in the DIV format.

8.6 The start-of-message prefix consists of a 12-bit clock sync pattern and a 12-bit word sync pattern for a total of 24 bits. The clock sync pattern is 101010101010. The word sync pattern is 111010000101. The word sync pattern may be viewed as a 11101000 pattern plus inverse polarity Hamming bits 0101. (See figure 8-2.)

8.7 Timing relationships of the DIV code relative to the video synchronization pattern are shown in figure 8-4. Timing relationships are shown in microseconds and in data clock cycles. Note that all timing relationships are an integral number of data clock cycles.

8.8 The data clock rate is either 2.8665 MHz or 182 times the video horizontal line rate. For monochrome encoding, 182 times the video horizontal line rate is exactly 2.8665 MHz. For color encoding, 182 times the video horizontal line rate is 2.8636 MHz. Either 2.8665 MHz or 182 times the video horizontal line rate is acceptable for encoding onto color video signals. The data clock shall have no more than $\pm$0.05 microseconds jitter per horizontal line period, and its long term rate shall be either 182 times the encoded video line rate or 2.8665 MHz $\pm$0.01 percent.

8.9 Amplitudes are expressed in terms of Institute of Radio Engineers (IRE) units. The amplitudes of the DIV waveform are shown in figure 8-3. One IRE unit equals 7.14 millivolts. Figure 8-3 also shows the maximum and minimum slopes of the leading and trailing edges of the DIV waveform.

8.10 A Hamming error correction code is used in each data group and in the error detection (LRCC) group (see figure 8-2). Details of the Hamming code generation and format are shown in figure 7-2A and table 8-1. Details of the Hamming code interpretation upon decoding in the presence of noise are shown in figure 7-2B and table 8-2. The DIV encoder must generate a 4-bit Hamming code on each data byte (according to the rules given in figure 7-2A) and append it (in inverse polarity) to the end of the data byte to form a 12-bit data group, which is actually encoded onto the video. Random errors up to a density of 1 per each 12-bit data group can be automatically corrected by the DIV decoder (according to the rules given in figure 7-2B and table 8-2). It is very important to note before encoding that the Hamming code polarity is inverted from that shown in figure 7-2A. It must be inverted again in the decoder before interpretation. (See section 6.6.2.2 for an explanation of why inverse polarity is used for the Hamming code.)

8.11 An 8-bit LRCC is to be generated on the data (not data plus Hamming bits) contained in each line of data encoded. The 8-bit LRCC group has Hamming bits generated and attached to it exactly the same as 8-bit data groups. The DIV encoder, conversely, must first make a Hamming determination according to the rules given in figure 7-2B and

table 8-2 before doing an LRCC character check. The LRCC is generated using the polynomial X^8 + 1 (X to the 8th power plus 1).

8.12 The bandwidth required depends on the signal-to-noise ratio of the video recorder used and/or the transmission channel used. The system will have acceptably low error rates down to about 2 MHz of bandwidth if the signal-to-noise ratio is above 40 dB. (See figure 8-5.)

DATA AMPLITUDE

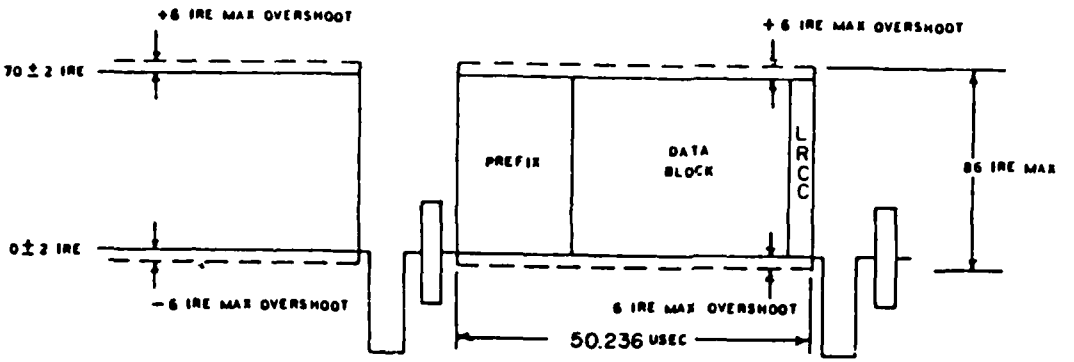

POLARITY: A data "1" is recorded as a high (70 ± 2 IRE units)

A data "0" is recorded as a low (0 ± 2 IRE units)

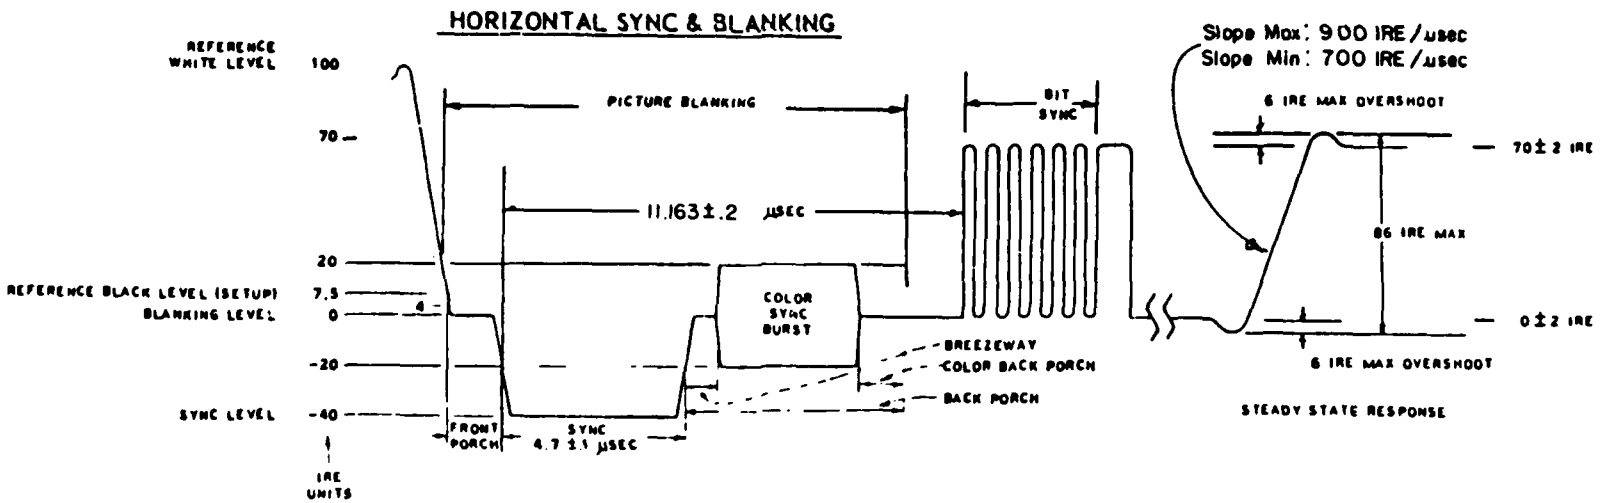

Figure 8-3. Amplitude and Slopes.

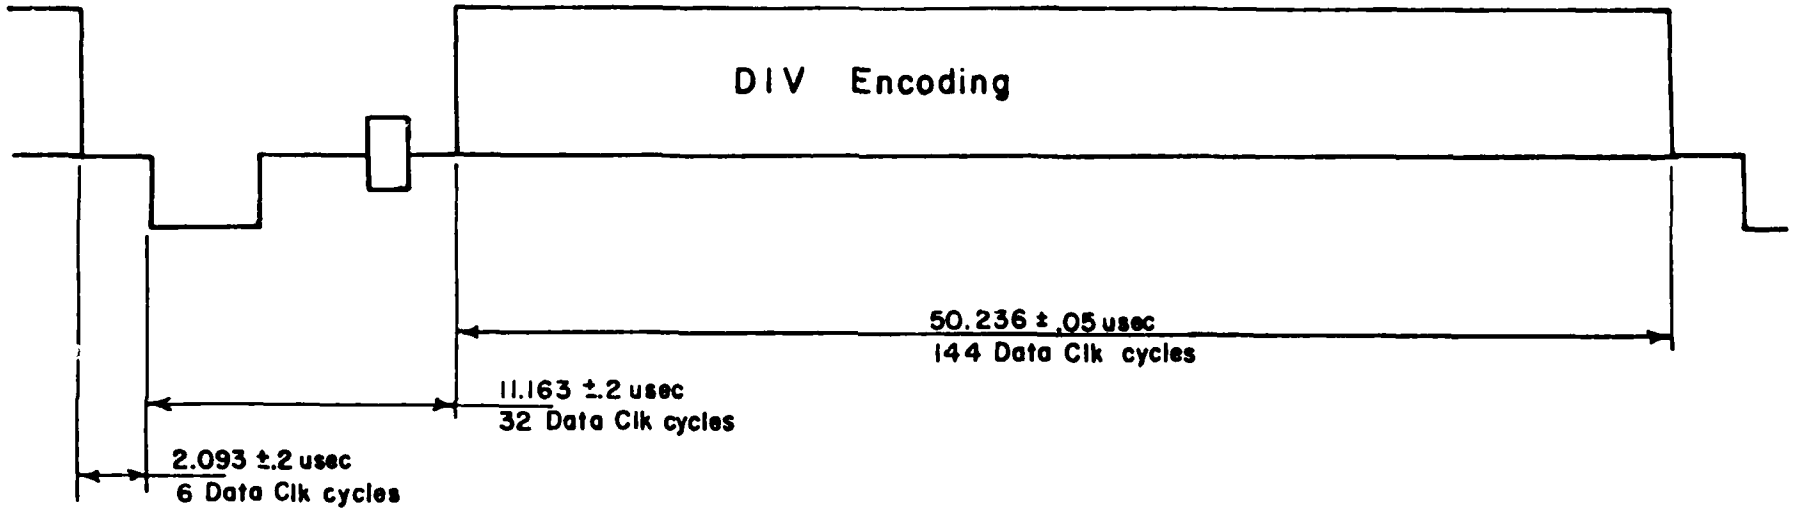

Bit Rate (Data Clk) = 182 x the video horizontal line rate = 2.8665 MHz for monochrome.

For color, either 182 x the horizontal line rate (i.e., 2.8665 MHz) or 2.8665 MHz is acceptable.

Figure 8-4. Timing Detail.

TABLE 8-1

HAMMING ENCODING LIST

DECIMAL DATA	BINARY DATA	HAMMING CODE H3 H2 H1 H0	INVERSE CODE H3 H2 H1 H0
0	0 0 0 0 0 0 0 0	0 0 0 0	1 1 1 1
1	0 0 0 0 0 0 0 1	0 0 1 1	1 1 0 0
2	0 0 0 0 0 0 1 0	0 1 0 1	1 0 1 0
3	0 0 0 0 0 0 1 1	0 1 1 0	1 0 0 1
4	0 0 0 0 0 1 0 0	0 1 1 0	1 0 0 1
5	0 0 0 0 0 1 0 1	0 1 0 1	1 0 1 0
6	0 0 0 0 0 1 1 0	0 0 1 1	1 1 0 0
7	0 0 0 0 0 1 1 1	0 0 0 0	1 1 1 1
8	0 0 0 0 1 0 0 0	0 1 1 1	1 0 0 0
9	0 0 0 0 1 0 0 1	0 1 0 0	1 0 1 1
10	0 0 0 0 1 0 1 0	0 0 1 0	1 1 0 1
11	0 0 0 0 1 0 1 1	0 0 0 1	1 1 1 0
12	0 0 0 0 1 1 0 0	0 0 0 1	1 1 1 0
13	0 0 0 0 1 1 0 1	0 0 1 0	1 1 0 1
14	0 0 0 0 1 1 1 0	0 1 0 0	1 0 1 1
15	0 0 0 0 1 1 1 1	0 1 1 1	1 0 0 0
16	0 0 0 1 0 0 0 0	1 0 0 1	0 1 1 0
17	0 0 0 1 0 0 0 1	1 0 1 0	0 1 0 1
18	0 0 0 1 0 0 1 0	1 1 0 0	0 0 1 1
19	0 0 0 1 0 0 1 1	1 1 1 1	0 0 0 0
20	0 0 0 1 0 1 0 0	1 1 1 1	0 0 0 0
21	0 0 0 1 0 1 0 1	1 1 0 0	0 0 1 1
22	0 0 0 1 0 1 1 0	1 0 1 0	0 1 0 1
23	0 0 0 1 0 1 1 1	1 0 0 1	0 1 1 0
24	0 0 0 1 1 0 0 0	1 1 1 0	0 0 0 1
25	0 0 0 1 1 0 0 1	1 1 0 1	0 0 1 0
26	0 0 0 1 1 0 1 0	1 0 1 1	0 1 0 0
27	0 0 0 1 1 0 1 1	1 0 0 0	0 1 1 1
28	0 0 0 1 1 1 0 0	1 0 0 0	0 1 1 1
29	0 0 0 1 1 1 0 1	1 0 1 1	0 1 0 0
30	0 0 0 1 1 1 1 0	1 1 0 1	0 0 1 0
31	0 0 0 1 1 1 1 1	1 1 1 0	0 0 0 1
32	0 0 1 0 0 0 0 0	1 0 1 0	0 1 0 1
33	0 0 1 0 0 0 0 1	1 0 0 1	0 1 1 0
34	0 0 1 0 0 0 1 0	1 1 1 1	0 0 0 0
35	0 0 1 0 0 0 1 1	1 1 0 0	0 0 1 1
36	0 0 1 0 0 1 0 0	1 1 0 0	0 0 1 1
37	0 0 1 0 0 1 0 1	1 1 1 1	0 0 0 0
38	0 0 1 0 0 1 1 0	1 0 0 1	0 1 1 0
39	0 0 1 0 0 1 1 1	1 0 1 0	0 1 0 1
40	0 0 1 0 1 0 0 0	1 1 0 1	0 0 1 0
41	0 0 1 0 1 0 0 1	1 1 1 0	0 0 0 1
42	0 0 1 0 1 0 1 0	1 0 0 0	0 1 1 1
43	0 0 1 0 1 0 1 1	1 0 1 1	0 1 0 0
44	0 0 1 0 1 1 0 0	1 0 1 1	0 1 0 0
45	0 0 1 0 1 1 0 1	1 0 0 0	0 1 1 1
46	0 0 1 0 1 1 1 0	1 1 1 0	0 0 0 1
47	0 0 1 0 1 1 1 1	1 1 0 1	0 0 1 0
48	0 0 1 1 0 0 0 0	0 0 1 1	1 1 0 0
49	0 0 1 1 0 0 0 1	0 0 0 0	1 1 1 1
50	0 0 1 1 0 0 1 0	0 1 1 0	1 0 0 1
51	0 0 1 1 0 0 1 1	0 1 0 1	1 0 1 0
52	0 0 1 1 0 1 0 0	0 1 0 1	1 0 1 0
53	0 0 1 1 0 1 0 1	0 1 1 0	1 0 0 1
54	0 0 1 1 0 1 1 0	0 0 0 0	1 1 1 1

55	0	0	1	1	0	1	1	1	0	0	1	1	1	1	0	0
56	0	0	1	1	1	0	0	0	0	1	0	0	1	0	1	1
57	0	0	1	1	1	0	0	1	0	1	1	1	1	0	0	0
58	0	0	1	1	1	0	1	0	0	0	0	1	1	1	1	0
59	0	0	1	1	1	0	1	1	0	0	1	0	1	1	0	1
60	0	0	1	1	1	1	0	0	0	0	1	0	1	1	0	1
61	0	0	1	1	1	1	0	1	0	0	0	1	1	1	1	0
62	0	0	1	1	1	1	1	0	0	1	1	1	1	0	0	0
63	0	0	1	1	1	1	1	1	0	1	0	0	1	0	1	1
64	0	1	0	0	0	0	0	0	1	0	1	1	0	1	0	0
65	0	1	0	0	0	0	0	1	1	0	0	0	0	1	1	1
66	0	1	0	0	0	0	1	0	1	1	1	0	0	0	0	1
67	0	1	0	0	0	0	1	1	1	1	0	1	0	0	1	0
68	0	1	0	0	0	1	0	0	1	1	0	1	0	0	1	0
69	0	1	0	0	0	1	0	1	1	1	1	0	0	0	0	1
70	0	1	0	0	0	1	1	0	1	0	0	0	0	1	1	0
71	0	1	0	0	0	1	1	1	1	0	1	1	0	1	0	0
72	0	1	0	0	1	0	0	0	1	1	0	0	0	0	1	1
73	0	1	0	0	1	0	0	1	1	1	1	1	0	0	0	0
74	0	1	0	0	1	0	1	0	1	0	0	1	0	1	1	0
75	0	1	0	0	1	0	1	1	1	0	1	0	0	1	0	1
76	0	1	0	0	1	1	0	0	1	0	1	0	0	1	0	1
77	0	1	0	0	1	1	0	1	1	0	0	1	0	1	1	0
78	0	1	0	0	1	1	1	0	1	1	1	1	0	0	0	0
79	0	1	0	0	1	1	1	1	1	1	0	0	0	0	1	1
80	0	1	0	1	0	0	0	0	0	0	1	0	1	1	0	1
81	0	1	0	1	0	0	0	1	0	0	0	1	1	1	1	0
82	0	1	0	1	0	0	1	0	0	1	1	1	1	0	0	0
83	0	1	0	1	0	0	1	1	0	1	0	0	1	0	1	1
84	0	1	0	1	0	1	0	0	0	1	0	0	1	0	1	1
85	0	1	0	1	0	1	0	1	0	1	1	1	1	0	0	0
86	0	1	0	1	0	1	1	0	0	0	0	1	1	1	1	0
87	0	1	0	1	0	1	1	1	0	0	1	0	1	1	0	1
88	0	1	0	1	1	0	0	0	0	1	0	1	1	0	1	0
89	0	1	0	1	1	0	0	1	0	1	1	0	1	0	0	1
90	0	1	0	1	1	0	1	0	0	0	0	0	1	1	1	1
91	0	1	0	1	1	0	1	1	0	0	0	1	1	1	0	0
92	0	1	0	1	1	1	0	0	0	0	1	1	1	1	0	0
93	0	1	0	1	1	1	0	1	0	0	0	0	1	1	1	1
94	0	1	0	1	1	1	1	0	0	1	1	0	1	0	0	1
95	0	1	0	1	1	1	1	1	0	1	0	1	1	0	1	0
96	0	1	1	0	0	0	0	0	0	0	0	1	1	1	1	0
97	0	1	1	0	0	0	0	1	0	0	1	0	1	1	0	1
98	0	1	1	0	0	0	1	0	0	1	0	0	1	0	1	1
99	0	1	1	0	0	0	1	1	0	1	1	1	1	0	0	0
100	0	1	1	0	0	1	0	0	0	1	1	1	1	0	0	0
101	0	1	1	0	0	1	0	1	0	1	0	0	1	0	1	1
102	0	1	1	0	0	1	1	0	0	0	0	1	1	1	0	1
103	0	1	1	0	0	1	1	1	0	0	0	1	1	1	1	0
104	0	1	1	0	1	0	0	0	0	1	1	0	1	0	0	1
105	0	1	1	0	1	0	0	1	0	1	0	1	1	0	1	0
106	0	1	1	0	1	0	1	0	0	0	1	1	1	1	0	0
107	0	1	1	0	1	0	1	1	0	0	0	0	1	1	1	1
108	0	1	1	0	1	1	0	0	0	0	0	0	1	1	1	1
109	0	1	1	0	1	1	0	1	0	0	1	1	1	1	0	0
110	0	1	1	0	1	1	1	0	0	1	0	1	1	0	1	0
111	0	1	1	0	1	1	1	1	0	1	1	0	1	0	0	1
112	0	1	1	1	0	0	0	0	1	0	0	0	0	1	1	1
113	0	1	1	1	0	0	0	1	1	0	1	1	0	1	0	0
114	0	1	1	1	0	0	1	0	1	1	0	1	0	0	1	0

115	0	1	1	1	0	0	1	1	1	1	1	0	0	0	0	1
116	0	1	1	1	0	1	0	0	1	1	1	0	0	0	0	1
117	0	1	1	1	0	1	0	1	1	1	0	1	0	0	1	0
118	0	1	1	1	0	1	1	0	1	0	1	1	0	1	0	0
119	0	1	1	1	0	1	1	1	1	0	0	0	0	1	1	1
120	0	1	1	1	1	0	0	0	1	1	1	1	0	0	0	0
121	0	1	1	1	1	0	0	1	1	1	0	0	0	0	1	1
122	0	1	1	1	1	0	1	0	1	0	1	0	0	1	0	1
123	0	1	1	1	1	0	1	1	1	0	0	1	0	1	1	0
124	0	1	1	1	1	1	0	0	1	0	0	1	0	1	1	0
125	0	1	1	1	1	1	0	1	1	0	1	0	0	1	0	1
126	0	1	1	1	1	1	1	0	1	1	0	0	0	0	1	1
127	0	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0
128	1	0	0	0	0	0	0	0	1	1	0	0	0	0	1	1
129	1	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0
130	1	0	0	0	0	0	1	0	1	0	0	1	0	1	1	0
131	1	0	0	0	0	0	1	1	1	0	1	0	0	1	0	1
132	1	0	0	0	0	1	0	0	1	0	1	0	0	1	0	1
133	1	0	0	0	0	1	0	1	1	0	0	1	0	1	1	0
134	1	0	0	0	0	1	1	0	1	1	1	1	0	0	0	0
135	1	0	0	0	0	1	1	1	1	1	0	0	0	0	1	1
136	1	0	0	0	1	0	0	0	1	0	1	1	0	1	0	0
137	1	0	0	0	1	0	0	1	1	0	0	0	0	1	1	1
138	1	0	0	0	1	0	1	0	1	1	1	0	0	0	0	1
139	1	0	0	0	1	0	1	1	1	1	0	1	0	0	1	0
140	1	0	0	0	1	1	0	0	1	1	0	1	0	0	1	0
141	1	0	0	0	1	1	0	1	1	1	1	0	0	0	0	1
142	1	0	0	0	1	1	1	0	1	0	0	0	0	1	1	1
143	1	0	0	0	1	1	1	1	1	0	1	1	0	1	0	0
144	1	0	0	1	0	0	0	0	0	1	0	1	1	0	1	0
145	1	0	0	1	0	0	0	1	0	1	1	0	1	0	0	1
146	1	0	0	1	0	0	1	0	0	0	0	0	1	1	1	1
147	1	0	0	1	0	0	1	1	0	0	1	1	1	1	0	0
148	1	0	0	1	0	1	0	0	0	0	1	1	1	1	0	0
149	1	0	0	1	0	1	0	1	0	0	0	0	1	1	1	1
150	1	0	0	1	0	1	1	0	0	1	1	0	1	0	0	1
151	1	0	0	1	0	1	1	1	0	1	0	1	1	0	1	0
152	1	0	0	1	1	0	0	0	0	0	1	0	1	1	0	1
153	1	0	0	1	1	0	0	1	0	0	0	1	1	1	1	0
154	1	0	0	1	1	0	1	0	0	1	1	1	1	0	0	0
155	1	0	0	1	1	0	1	1	0	1	0	0	1	0	1	1
156	1	0	0	1	1	1	0	0	0	1	0	0	1	0	1	1
157	1	0	0	1	1	1	0	1	0	1	1	1	1	0	0	0
158	1	0	0	1	1	1	1	0	0	0	0	1	1	1	1	0
159	1	0	0	1	1	1	1	1	0	0	1	0	1	1	0	1
160	1	0	1	0	0	0	0	0	0	1	1	0	1	0	0	1
161	1	0	1	0	0	0	0	1	0	1	0	1	1	0	1	0
162	1	0	1	0	0	0	1	0	0	0	1	1	1	1	0	0
163	1	0	1	0	0	0	1	1	0	0	0	0	1	1	1	1
164	1	0	1	0	0	1	0	0	0	0	0	0	1	1	1	1
165	1	0	1	0	0	1	0	1	0	0	1	1	1	1	0	0
166	1	0	1	0	0	1	1	0	0	1	0	1	1	0	1	0
167	1	0	1	0	0	1	1	1	0	1	1	0	1	0	0	1
168	1	0	1	0	1	0	0	0	0	0	0	1	1	1	1	0
169	1	0	1	0	1	0	0	1	0	0	1	0	1	1	0	1
170	1	0	1	0	1	0	1	0	0	1	0	0	1	0	1	1
171	1	0	1	0	1	0	1	1	0	1	1	1	1	0	0	0
172	1	0	1	0	1	1	0	0	0	1	1	1	1	0	0	0
173	1	0	1	0	1	1	0	1	0	1	0	0	1	0	1	1
174	1	0	1	0	1	1	1	0	0	0	1	0	1	1	0	1

175	1	0	1	0	1	1	1	1	0	0	0	1	1	1	1	0
176	1	0	1	1	0	0	0	0	1	1	1	1	0	0	0	0
177	1	0	1	1	0	0	0	1	1	1	0	0	0	0	1	1
178	1	0	1	1	0	0	1	0	1	0	1	0	0	1	0	1
179	1	0	1	1	0	0	1	1	1	0	0	1	0	1	1	0
180	1	0	1	1	0	1	0	0	1	0	0	1	0	1	1	0
181	1	0	1	1	0	1	0	1	1	0	1	0	0	1	0	1
182	1	0	1	1	0	1	1	0	1	1	0	0	0	0	1	1
183	1	0	1	1	0	1	1	1	1	1	1	1	0	0	0	0
184	1	0	1	1	1	0	0	0	1	0	0	0	0	1	1	1
185	1	0	1	1	1	0	0	1	1	0	1	1	0	1	0	0
186	1	0	1	1	1	0	1	0	1	1	0	1	0	0	1	0
187	1	0	1	1	1	0	1	1	1	1	1	0	0	0	0	1
188	1	0	1	1	1	1	0	0	1	1	1	0	0	0	0	1
189	1	0	1	1	1	1	0	1	1	1	0	1	0	0	1	0
190	1	0	1	1	1	1	1	0	1	0	1	1	0	1	0	0
191	1	0	1	1	1	1	1	1	1	0	0	0	0	1	1	1
192	1	1	0	0	0	0	0	0	0	1	1	1	1	0	0	0
193	1	1	0	0	0	0	0	1	0	1	0	0	1	0	1	1
194	1	1	0	0	0	0	1	0	0	0	1	0	1	1	0	1
195	1	1	0	0	0	0	1	1	0	0	0	1	1	1	1	0
196	1	1	0	0	0	1	0	0	0	0	0	1	1	1	1	0
197	1	1	0	0	0	1	0	1	0	0	1	0	1	1	0	1
198	1	1	0	0	0	1	1	0	0	1	0	0	1	0	1	1
199	1	1	0	0	0	1	1	1	0	1	1	1	1	0	0	0
200	1	1	0	0	1	0	0	0	0	0	0	0	1	1	1	1
201	1	1	0	0	1	0	0	1	0	0	1	1	1	1	0	0
202	1	1	0	0	1	0	1	0	0	1	0	1	1	0	1	0
203	1	1	0	0	1	0	1	1	0	1	1	0	1	0	0	1
204	1	1	0	0	1	1	0	0	0	1	1	0	1	0	0	1
205	1	1	0	0	1	1	0	1	0	1	0	1	1	0	1	0
206	1	1	0	0	1	1	1	0	0	0	1	1	1	1	0	0
207	1	1	0	0	1	1	1	1	0	0	0	0	1	1	1	1
208	1	1	0	1	0	0	0	0	1	1	1	0	0	0	0	1
209	1	1	0	1	0	0	0	1	1	1	0	1	0	0	1	0
210	1	1	0	1	0	0	1	0	1	0	1	1	0	1	0	0
211	1	1	0	1	0	0	1	1	1	0	0	0	0	1	1	1
212	1	1	0	1	0	1	0	0	1	0	0	0	0	1	1	1
213	1	1	0	1	0	1	0	1	1	0	1	1	0	1	0	0
214	1	1	0	1	0	1	1	0	1	1	0	1	0	0	1	0
215	1	1	0	1	0	1	1	1	1	1	1	0	0	0	0	1
216	1	1	0	1	1	0	0	0	1	0	0	1	0	1	1	0
217	1	1	0	1	1	0	0	1	1	0	1	0	0	1	0	1
218	1	1	0	1	1	0	1	0	1	1	0	0	0	[illegible]	1	1
219	1	1	0	1	1	0	1	1	1	1	1	1	0	0	0	0
220	1	1	0	1	1	1	0	0	1	1	1	1	0	0	0	0
221	1	1	0	1	1	1	0	1	1	1	0	0	0	0	1	1
222	1	1	0	1	1	1	1	0	1	0	1	0	0	1	0	1
223	1	1	0	1	1	1	1	1	1	0	0	1	0	1	1	0
224	1	1	1	0	0	0	0	0	1	1	0	1	0	0	1	0
225	1	1	1	0	0	0	0	1	1	1	1	0	0	0	0	1
226	1	1	1	0	0	0	1	0	1	0	0	0	0	1	1	1
227	1	1	1	0	0	0	1	1	1	0	1	1	0	1	0	0
228	1	1	1	0	0	1	0	0	1	0	1	1	0	1	0	0
229	1	1	1	0	0	1	0	1	1	0	0	0	0	1	1	1
230	1	1	1	0	0	1	1	0	1	1	1	0	0	0	0	1
231	1	1	1	0	0	1	1	1	1	1	0	1	0	0	1	0
232	1	1	1	0	1	0	0	0	1	0	1	0	0	1	0	1
233	1	1	1	0	1	0	0	1	1	0	0	1	0	1	1	0
234	1	1	1	0	1	0	1	0	1	1	1	1	0	0	0	0

235	1	1	1	0	1	0	1	1	1	1	0	0	0	0	1	1
236	1	1	1	0	1	1	0	0	1	1	0	0	0	0	1	1
237	1	1	1	0	1	1	0	1	1	1	1	1	0	0	0	0
238	1	1	1	0	1	1	1	0	1	0	0	1	0	1	1	0
239	1	1	1	0	1	1	1	1	1	0	1	0	0	1	0	1
240	1	1	1	1	0	0	0	0	0	1	0	0	1	0	1	1
241	1	1	1	1	0	0	0	1	0	1	1	1	1	0	0	0
242	1	1	1	1	0	0	1	0	0	0	0	1	1	1	1	0
243	1	1	1	1	0	0	1	1	0	0	1	0	1	1	0	1
244	1	1	1	1	0	1	0	0	0	0	1	0	1	1	0	1
245	1	1	1	1	0	1	0	1	0	0	0	1	1	1	1	0
246	1	1	1	1	0	1	1	0	0	1	1	1	1	0	0	0
247	1	1	1	1	0	1	1	1	0	1	0	0	1	0	1	1
248	1	1	1	1	1	0	0	0	0	0	1	1	1	1	0	0
249	1	1	1	1	1	0	0	1	0	0	0	0	1	1	1	1
250	1	1	1	1	1	0	1	0	0	1	1	0	1	0	0	1
251	1	1	1	1	1	0	1	1	0	1	0	1	1	0	1	0
252	1	1	1	1	1	1	0	0	0	1	0	1	1	0	1	0
253	1	1	1	1	1	1	0	1	0	1	1	0	1	0	0	1
254	1	1	1	1	1	1	1	0	0	0	0	0	1	1	1	1
255	1	1	1	1	1	1	1	1	0	0	1	1	1	1	0	0

TABLE 8-2

HAMMING DECODE TABLE

ADD DATA
IN OUT (Hexadecimal notation is used)

000 00	001 00	002 00	003 01	004 00	005 02	006 04	007 08
008 00	009 10	00A 20	00B 40	00C 80	00D 02	00E 04	00F 14
010 00	011 01	012 01	013 01	014 09	015 05	016 03	017 01
018 41	019 21	01A 11	01B 01	01C 15	01D 05	01E 03	01F 81
020 00	021 02	022 0A	023 06	024 02	025 02	026 03	027 02
028 00	029 82	02A 16	02B 06	02C 12	02D 02	02E 42	02F 22
030 07	031 0B	032 03	033 01	034 03	035 02	036 03	037 03
038 07	039 17	03A 83	03B 01	03C 23	03D 43	03E 03	03F 13
040 00	041 0C	042 04	043 06	044 04	045 05	046 04	047 04
048 00	049 10	04A 84	04B 06	04C 24	04D 44	04E 04	04F 14
050 07	051 05	052 0D	053 01	054 05	055 05	056 04	057 05
058 07	059 85	05A 11	05B 01	05C 15	05D 05	05E 45	05F 25
060 07	061 06	062 06	063 06	064 0E	065 02	066 04	067 06
068 46	069 26	06A 16	06B 06	06C 12	06D 02	06E 04	06F 86
070 07	071 07	072 07	073 06	074 07	075 05	076 03	077 0F
078 07	079 17	07A 27	07B 47	07C 87	07D 05	07E 03	07F 13
080 00	081 0C	082 0A	083 08	084 09	085 08	086 08	087 08
088 1C	089 0C	08A 0A	08B 88	08C 48	08D 28	08E 18	08F 08
090 09	091 0B	092 0D	093 01	094 09	095 09	096 09	097 08
098 89	099 0B	09A 0D	09B 1D	09C 09	09D 19	09E 29	09F 49
0A0 0A	0A1 0B	0A2 0A	0A3 0A	0A4 0E	0A5 02	0A6 0A	0A7 08
0A8 2A	0A9 4A	0AA 0A	0AB 1A	0AC 0E	0AD 1E	0AE 8A	0AF 08
0B0 0B	0B1 0B	0B2 0A	0B3 0B	0B4 09	0B5 0B	0B6 03	0B7 0F
0B8 1B	0B9 0B	0BA 4B	0BB 2B	0BC 09	0BD 8B	0BE 1F	0BF 0F
0C0 0C	0C1 0C	0C2 0D	0C3 0C	0C4 0E	0C5 0C	0C6 04	0C7 08
0C8 1C	0C9 0C	0CA 4C	0CB 2C	0CC 0E	0CD 8C	0CE 18	0CF 08
0D0 0D	0D1 0C	0D2 0D	0D3 0D	0D4 09	0D5 05	0D6 0D	0D7 0F
0D8 2D	0D9 4D	0DA 0D	0DB 1D	0DC 09	0DD 19	0DE 8D	0DF 0F
0E0 0E	0E1 0C	0E2 0A	0E3 06	0E4 0E	0E5 0E	0E6 0E	0E7 0F
0E8 8E	0E9 0C	0EA 0A	0EB 1A	0EC 0E	0ED 1E	0EE 2E	0EF 4E
0F0 07	0F1 0B	0F2 0D	0F3 0F	0F4 0E	0F5 0F	0F6 0F	0F7 0F
0F8 1B	0F9 0B	0FA 0D	0FB 8F	0FC 4F	0FD 2F	0FE 1F	0FF 0F
100 00	101 10	102 30	103 30	104 12	105 90	106 04	107 14
108 10	109 10	10A 11	10B 10	10C 12	10D 10	10E 18	10F 14
110 31	111 51	112 11	113 01	114 15	115 05	116 91	117 13
118 11	119 10	11A 11	11B 11	11C 15	11D 19	11E 11	11F 13
120 92	121 10	122 16	123 06	124 12	125 02	126 32	127 52
128 12	129 10	12A 16	12B 1A	12C 12	12D 12	12E 12	12F 13
130 07	131 17	132 11	133 93	134 53	135 33	136 03	137 13
138 1B	139 17	13A 11	13B 13	13C 12	13D 13	13E 13	13F 13
140 00	141 10	142 16	143 94	144 54	145 34	146 04	147 14
148 1C	149 10	14A 16	14B 14	14C 15	14D 14	14E 14	14F 14
150 95	151 17	152 11	153 01	154 15	155 05	156 35	157 55
158 15	159 17	15A 11	15B 1D	15C 15	15D 15	15E 15	15F 14
160 36	161 56	162 16	163 06	164 12	165 02	166 96	167 14
168 16	169 17	16A 16	16B 16	16C 12	16D 1E	16E 16	16F 14
170 07	171 17	172 57	173 37	174 15	175 97	176 03	177 13
178 17	179 17	17A 16	17B 17	17C 15	17D 17	17E 1F	17F 13
180 1C	181 0C	182 98	183 1A	184 38	185 58	186 18	187 08
188 1C	189 10	18A 18	18B 1A	18C 18	18D 19	18E 18	18F 18
190 1B	191 99	192 0D	193 1D	194 09	195 19	196 59	197 39
198 1B	199 19	19A 11	19B 1D	19C 19	19D 19	19E 18	19F 19

1A0	5A	1A1	3A	1A2	0A	1A3	1A	1A4	0E	1A5	1E	1A6	18	1A7	9A
1A8	1B	1A9	1A	1AA	1A	1AB	1A	1AC	12	1AD	1E	1AE	18	1AF	1A
1B0	1B	1B1	0B	1B2	3B	1B3	5B	1B4	9B	1B5	19	1B6	1F	1B7	CF
1B8	1B	1B9	1B	1BA	1B	1BB	1A	1BC	1B	1BD	19	1BE	1F	1BF	13
1C0	1C	1C1	0C	1C2	3C	1C3	5C	1C4	9C	1C5	1E	1C6	18	1C7	08
1C8	1C	1C9	1C	1CA	1C	1CB	1D	1CC	1C	1CD	1E	1CE	18	1CF	14
1D0	5D	1D1	3D	1D2	0D	1D3	1D	1D4	09	1D5	19	1D6	1F	1D7	9D
1D8	1C	1D9	1D	1DA	1D	1DB	1D	1DC	15	1DD	19	1DE	1F	1DF	1D
1E0	1C	1E1	9E	1E2	0A	1E3	1A	1E4	CE	1E5	1E	1E6	5E	1E7	3E
1E8	1C	1E9	1E	1EA	16	1EB	1A	1EC	1E	1ED	1E	1EE	1F	1EF	1E
1F0	1B	1F1	0B	1F2	9F	1F3	1D	1F4	3F	1F5	5F	1F6	1F	1F7	0F
1F8	1B	1F9	17	1FA	1F	1FB	1D	1FC	1F	1FD	1E	1FE	1F	1FF	1F
200	00	201	60	202	20	203	30	204	24	205	34	206	A0	207	22
208	20	209	21	20A	20	20B	20	20C	24	20D	28	20E	20	20F	22
210	31	211	21	212	61	213	01	214	23	215	A1	216	35	217	25
218	21	219	21	21A	20	21B	21	21C	23	21D	21	21E	29	21F	23
220	36	221	26	222	20	223	A2	224	62	225	02	226	32	227	22
228	2A	229	26	22A	20	22B	22	22C	23	22D	22	22E	22	22F	22
230	A3	231	21	232	27	233	37	234	23	235	23	236	03	237	63
238	23	239	21	23A	27	23B	2B	23C	23	23D	23	23E	23	23F	22
240	A4	241	26	242	20	243	30	244	24	245	34	246	04	247	64
248	24	249	26	24A	20	24B	2C	24C	24	24D	24	24E	24	24F	25
250	31	251	21	252	27	253	A5	254	65	255	05	256	35	257	25
258	2D	259	21	25A	27	25B	25	25C	24	25D	25	25E	25	25F	25
260	36	261	26	262	66	263	06	264	24	265	A6	266	32	267	22
268	26	269	26	26A	27	26B	26	26C	24	26D	26	26E	2E	26F	22
270	07	271	67	272	27	273	37	274	23	275	33	276	A7	277	25
278	27	279	26	27A	27	27B	27	27C	23	27D	2F	27E	27	27F	25
280	2A	281	A8	282	3C	283	2C	284	38	285	28	286	68	287	08
288	2A	289	28	28A	20	28B	2C	28C	28	28D	28	28E	29	28F	28
290	2D	291	3D	292	A9	293	2B	294	09	295	69	296	29	297	39
298	2D	299	21	29A	29	29B	2B	29C	29	29D	28	29E	29	29F	29
2A0	2A	2A1	3A	2A2	0A	2A3	6A	2A4	AA	2A5	28	2A6	2E	2A7	3E
2A8	2A	2A9	2A	2AA	2A	2AB	2B	2AC	2A	2AD	28	2AE	2E	2AF	22
2B0	6B	2B1	0B	2B2	3B	2B3	2B	2B4	3F	2B5	2F	2B6	29	2B7	AB
2B8	2A	2B9	2B	2BA	2B	2BB	2B	2BC	23	2BD	2F	2BE	29	2BF	2B
2C0	6C	2C1	0C	2C2	3C	2C3	2C	2C4	38	2C5	28	2C6	2E	2C7	AC
2C8	2D	2C9	2C	2CA	2C	2CB	2C	2CC	24	2CD	28	2CE	2E	2CF	2C
2D0	2D	2D1	3D	2D2	0D	2D3	6D	2D4	AD	2D5	2F	2D6	29	2D7	39
2D8	2D	2D9	2D	2DA	2D	2DB	2C	2DC	2D	2DD	2F	2DE	29	2DF	25
2E0	2A	2E1	3A	2E2	AE	2E3	2C	2E4	0E	2E5	6E	2E6	2E	2E7	3E
2E8	2A	2E9	26	2EA	2E	2EB	2C	2EC	2E	2ED	2F	2EE	2E	2EF	2E
2F0	2D	2F1	AF	2F2	3B	2F3	2B	2F4	3F	2F5	2F	2F6	6F	2F7	0F
2F8	2D	2F9	2F	2FA	27	2FB	2B	2FC	2F	2FD	2F	2FE	2E	2FF	2F
300	31	301	30	302	30	303	30	304	38	305	34	306	32	307	30
308	70	309	10	30A	20	30B	30	30C	24	30D	34	30E	32	30F	B0
310	31	311	31	312	31	313	30	314	31	315	33	316	35	317	39
318	31	319	21	31A	11	31B	71	31C	B1	31D	33	31E	35	31F	25
320	36	321	3A	322	32	323	30	324	32	325	33	326	32	327	32
328	36	329	26	32A	B2	32B	30	32C	12	32D	72	32E	32	32F	22
330	31	331	33	332	3B	333	37	334	33	335	33	336	32	337	33
338	31	339	B3	33A	27	33B	37	33C	23	33D	33	33E	73	33F	13
340	36	341	34	342	3C	343	30	344	34	345	34	346	35	347	34
348	36	349	B4	34A	20	34B	30	34C	24	34D	34	34E	74	34F	14
350	31	351	3D	352	35	353	37	354	35	355	34	356	35	357	35
358	31	359	21	35A	B5	35B	37	35C	15	35D	75	35E	35	35F	25
360	36	361	36	362	36	363	37	364	36	365	34	366	32	367	3E
368	36	369	26	36A	16	36B	76	36C	B6	36D	34	36E	32	36F	22
370	36	371	37	372	37	373	37	374	3F	375	33	376	35	377	37
378	77	379	17	37A	27	37B	37	37C	23	37D	33	37E	35	37F	37

380 38	381 3A	382 3C	383 30	384 38	385 38	386 38	387 39
388 B8	389 3A	38A 3C	38B 2C	38C 38	38D 28	38E 18	38F 78
390 31	391 3D	392 3B	393 39	394 38	395 39	396 39	397 39
398 2D	399 3D	39A 3B	39B B9	39C 79	39D 19	39E 29	39F 39
3A0 3A	3A1 3A	3A2 3B	3A3 3A	3A4 38	3A5 3A	3A6 32	3A7 3E
3A8 2A	3A9 3A	3AA 7A	3AB 1A	3AC 38	3AD BA	3AE 2E	3AF 3E
3B0 3B	3B1 3A	3B2 3B	3B3 3B	3B4 3F	3B5 33	3B6 3B	3B7 39
3B8 1B	3B9 7B	3BA 3B	3BB 2B	3BC 3F	3BD 2F	3BE BB	3BF 39
3C0 3C	3C1 3D	3C2 3C	3C3 3C	3C4 38	3C5 34	3C6 3C	3C7 3E
3C8 1C	3C9 7C	3CA 3C	3CB 2C	3CC 38	3CD 28	3CE BC	3CF 3E
3D0 3D	3D1 3D	3D2 3C	3D3 3D	3D4 3F	3D5 3D	3D6 35	3D7 39
3D8 2D	3D9 3D	3DA 7D	3DB 1D	3DC 3F	3DD BD	3DE 29	3DF 39
3E0 36	3E1 3A	3E2 3C	3E3 3E	3E4 3F	3E5 3E	3E6 3E	3E7 3E
3E8 2A	3E9 3A	3EA 3C	3EB BE	3EC 7E	3ED 1E	3EE 2E	3EF 3E
3F0 3F	3F1 3D	3F2 3B	3F3 37	3F4 3F	3F5 3F	3F6 3F	3F7 3E
3F8 BF	3F9 3D	3FA 3B	3FB 2B	3FC 3F	3FD 2F	3FE 1F	3FF 7F
400 00	401 60	402 50	403 40	404 54	405 44	406 42	407 C0
408 41	409 40	40A 40	40B 40	40C 48	40D 44	40E 42	40F 40
410 41	411 51	412 61	413 01	414 C1	415 43	416 45	417 55
418 41	419 41	41A 41	41B 40	41C 41	41D 43	41E 45	41F 49
420 46	421 56	422 C2	423 40	424 62	425 02	426 42	427 52
428 46	429 4A	42A 42	42B 40	42C 42	42D 43	42E 42	42F 42
430 41	431 C3	432 57	433 47	434 53	435 43	436 03	437 63
438 41	439 43	43A 4B	43B 47	43C 43	43D 43	43E 42	43F 43
440 46	441 C4	442 50	443 40	444 54	445 44	446 04	447 64
448 46	449 44	44A 4C	44B 40	44C 44	44D 44	44E 45	44F 44
450 41	451 51	452 C5	453 47	454 65	455 05	456 45	457 55
458 41	459 4D	45A 45	45B 47	45C 45	45D 44	45E 45	45F 45
460 46	461 56	462 66	463 06	464 C6	465 44	466 42	467 52
468 46	469 46	46A 46	46B 47	46C 46	46D 44	46E 42	46F 4E
470 07	471 67	472 57	473 47	474 53	475 43	476 45	477 C7
478 46	479 47	47A 47	47B 47	47C 4F	47D 43	47E 45	47F 47
480 C8	481 4A	482 4C	483 5C	484 48	485 58	486 68	487 C8
488 48	489 4A	48A 4C	48B 40	48C 48	48D 48	48E 48	48F 49
490 5D	491 4D	492 4B	493 C9	494 09	495 69	496 59	497 49
498 41	499 4D	49A 4B	49B 49	49C 48	49D 49	49E 49	49F 49
4A0 5A	4A1 4A	4A2 0A	4A3 6A	4A4 48	4A5 CA	4A6 5E	4A7 4E
4A8 4A	4A9 4A	4AA 4B	4AB 4A	4AC 48	4AD 4A	4AE 42	4AF 4E
4B0 6B	4B1 0B	4B2 4B	4B3 5B	4B4 4F	4B5 5F	4B6 CB	4B7 49
4B8 4B	4B9 4A	4BA 4B	4BB 4B	4BC 4F	4BD 43	4BE 4B	4BF 49
4C0 6C	4C1 0C	4C2 4C	4C3 5C	4C4 48	4C5 58	4C6 CC	4C7 4E
4C8 4C	4C9 4D	4CA 4C	4CB 4C	4CC 48	4CD 44	4CE 4C	4CF 4E
4D0 5D	4D1 4D	4D2 0D	4D3 6D	4D4 4F	4D5 CD	4D6 59	4D7 49
4D8 4D	4D9 4D	4DA 4C	4DB 4D	4DC 4F	4DD 4D	4DE 45	4DF 49
4E0 5A	4E1 4A	4E2 4C	4E3 CE	4E4 0E	4E5 6E	4E6 5E	4E7 4E
4E8 46	4E9 4A	4EA 4C	4EB 4E	4EC 4F	4ED 4E	4EE 4E	4EF 4E
4F0 CF	4F1 4D	4F2 4B	4F3 5B	4F4 4F	4F5 5F	4F6 6F	4F7 CF
4F8 4F	4F9 4D	4FA 4B	4FB 47	4FC 4F	4FD 4F	4FE 4F	4FF 4E
500 50	501 51	502 50	503 50	504 54	505 58	506 50	507 50
508 70	509 10	50A 50	50B 40	50C 54	50D 44	50E D0	50F 50
510 51	511 51	512 50	513 51	514 53	515 51	516 59	517 55
518 41	519 51	51A 11	51B 71	51C 53	51D D1	51E 45	51F 55
520 5A	521 56	522 50	523 52	524 53	525 52	526 52	527 52
528 46	529 56	52A 50	52B D2	52C 12	52D 72	52E 42	52F 52
530 53	531 51	532 57	533 5B	534 53	535 53	536 53	537 52
538 D3	539 51	53A 57	53B 47	53C 53	53D 43	53E 73	53F 13
540 54	541 56	542 50	543 5C	544 54	545 54	546 54	547 55
548 D4	549 56	54A 50	54B 40	54C 54	54D 44	54E 74	54F 14
550 5D	551 51	552 57	553 55	554 54	555 55	556 55	557 55
558 41	559 51	55A 57	55B D5	55C 15	55D 75	55E 45	55F 55

560 56	561 56	562 57	563 56	564 54	565 56	566 5E	567 52
568 46	569 56	56A 16	56B 76	56C 54	56D D6	56E 42	56F 52
570 57	571 56	572 57	573 57	574 53	575 5F	576 57	577 55
578 77	579 17	57A 57	57B 47	57C 53	57D 43	57E D7	57F 55
580 5A	581 58	582 50	583 5C	584 58	585 56	586 59	587 58
588 5A	589 D8	58A 4C	58B 5C	58C 48	58D 58	58E 18	58F 78
590 5D	591 51	592 59	593 5B	594 59	595 58	596 59	597 59
598 5D	599 4D	59A D9	59B 5B	59C 79	59D 19	59E 59	59F 49
5A0 5A	5A1 5A	5A2 5A	5A3 5B	5A4 5A	5A5 58	5A6 5E	5A7 52
5A8 5A	5A9 4A	5AA 7A	5AB 1A	5AC DA	5AD 58	5AE 5E	5AF 4E
5B0 5A	5B1 5B	5B2 5B	5B3 5B	5B4 53	5B5 5F	5B6 59	5B7 5B
5B8 1B	5B9 7B	5BA 4B	5BB 5B	5BC 4F	5BD 5F	5BE 59	5BF DB
5C0 5D	5C1 5C	5C2 5C	5C3 5C	5C4 54	5C5 58	5C6 5E	5C7 5C
5C8 1C	5C9 7C	5CA 4C	5CB 5C	5CC 48	5CD 58	5CE 5E	5CF DC
5D0 5D	5D1 5D	5D2 5D	5D3 5C	5D4 5D	5D5 5F	5D6 59	5D7 55
5D8 5D	5D9 4D	5DA 7D	5DB 1D	5DC DD	5DD 5F	5DE 59	5DF 49
5E0 5A	5E1 56	5E2 5E	5E3 5C	5E4 5E	5E5 5F	5E6 5E	5E7 5E
5E8 5A	5E9 4A	5EA DE	5EB 5C	5EC 7E	5ED 1E	5EE 5E	5EF 4E
5F0 5D	5F1 5F	5F2 57	5F3 5B	5F4 5F	5F5 5F	5F6 5E	5F7 5F
5F8 5D	5F9 DF	5FA 4B	5FB 5B	5FC 4F	5FD 5F	5FE 1F	5FF 7F
600 60	601 60	602 61	603 60	604 62	605 60	606 68	607 64
608 70	609 60	60A 20	60B 40	60C 62	60D E0	60E 74	60F 64
610 61	611 60	612 61	613 61	614 65	615 69	616 61	617 63
618 41	619 21	61A 61	61B 71	61C 65	61D 75	61E E1	61F 63
620 62	621 60	622 66	623 6A	624 62	625 62	626 62	627 63
628 E2	629 60	62A 66	62B 76	62C 62	62D 72	62E 42	62F 22
630 6B	631 67	632 61	633 63	634 62	635 63	636 63	637 63
638 77	639 67	63A 61	63B E3	63C 23	63D 43	63E 73	63F 63
640 6C	641 60	642 66	643 64	644 65	645 64	646 64	647 64
648 70	649 60	64A 66	64B E4	64C 24	64D 44	64E 74	64F 64
650 65	651 67	652 61	653 6D	654 65	655 65	656 65	657 64
658 E5	659 67	65A 61	65B 71	65C 65	65D 75	65E 45	65F 25
660 66	661 67	662 66	663 66	664 62	665 6E	666 66	667 64
668 46	669 26	66A 66	66B 76	66C 62	66D 72	66E E6	66F 64
670 67	671 67	672 66	673 67	674 65	675 67	676 6F	677 63
678 77	679 67	67A 27	67B 47	67C 65	67D E7	67E 73	67F 63
680 6C	681 60	682 68	683 6A	684 68	685 69	686 68	687 68
688 6C	689 7C	68A E8	68B 6A	68C 48	68D 28	68F 68	68F 78
690 6B	691 69	692 61	693 6D	694 69	695 69	696 68	697 69
698 6B	699 E9	69A 7D	69B 6D	69C 79	69D 69	69E 29	69F 49
6A0 6B	6A1 6A	6A2 6A	6A3 6A	6A4 62	6A5 6E	6A6 68	6A7 6A
6A8 2A	6A9 4A	6AA 7A	6AB 6A	6AC 7E	6AD 6E	6AE 68	6AF EA
6B0 6B	6B1 6B	6B2 6B	6B3 6A	6B4 6B	6B5 69	6B6 6F	6B7 63
6B8 6B	6B9 7B	6BA 4B	6BB 2B	6BC EB	6BD 69	6BE 6F	6BF 7F
6C0 6C	6C1 6C	6C2 6C	6C3 6D	6C4 6C	6C5 6E	6C6 68	6C7 64
6C8 6C	6C9 7C	6CA 4C	6CB 2C	6CC EC	6CD 6E	6CE 68	6CF 78
6D0 6C	6D1 6D	6D2 6D	6D3 6D	6D4 65	6D5 69	6D6 6F	6D7 6D
6D8 2D	6D9 4D	6DA 7D	6DB 6D	6DC 79	6DD 69	6DE 6F	6DF ED
6E0 6C	6E1 6E	6E2 66	6E3 6A	6E4 6E	6E5 6E	6E6 6F	6E7 6E
6E8 6C	6E9 EE	6EA 7A	6EB 6A	6EC 7E	6ED 6E	6EE 2E	6EF 4E
6F0 6B	6F1 67	6F2 6F	6F3 6D	6F4 6F	6F5 6E	6F6 6F	6F7 6F
6F8 6B	6F9 7B	6FA EF	6FB 6D	6FC 4F	6FD 2F	6FE 6F	6FF 7F
700 70	701 60	702 50	703 30	704 F0	705 72	706 74	707 64
708 70	709 70	70A 70	70B 71	70C 70	70D 72	70E 74	70F 78
710 31	711 51	712 61	713 71	714 65	715 75	716 73	717 F1
718 70	719 71	71A 71	71B 71	71C 79	71D 75	71E 73	71F 71
720 70	721 F2	722 66	723 76	724 62	725 72	726 32	727 52
728 70	729 72	72A 7A	72B 76	72C 72	72D 72	72E 73	72F 72
730 77	731 67	732 F3	733 71	734 53	735 33	736 73	737 63
738 77	739 7B	73A 73	73B 71	73C 73	73D 72	73E 73	73F 72

740 70 741 60 742 F4 743 76 744 54 745 34 746 74 747 64
748 70 749 7C 74A 74 74B 76 74C 74 74D 75 74E 74 74F 74
750 77 751 F5 752 61 753 71 754 65 755 75 756 35 757 55
758 77 759 75 75A 7D 75B 71 75C 75 75D 75 75E 74 75F 75
760 36 761 56 762 66 763 76 764 62 765 72 766 74 767 F6
768 77 769 76 76A 76 76B 76 76C 7E 76D 72 76E 74 76F 76
770 77 771 67 772 57 773 37 774 F7 775 75 776 73 777 63
778 77 779 77 77A 77 77B 76 77C 77 77D 75 77E 73 77F 7F
780 6C 781 7C 782 7A 783 F8 784 38 785 58 786 68 787 78
788 70 789 7C 78A 7A 78B 78 78C 79 78D 78 78E 78 78F 78
790 F9 791 7B 792 7D 793 6D 794 79 795 69 796 59 797 39
798 79 799 7B 79A 7D 79B 71 79C 79 79D 79 79E 79 79F 78
7A0 5A 7A1 3A 7A2 7A 7A3 6A 7A4 7E 7A5 6E 7A6 FA 7A7 78
7A8 7A 7A9 7B 7AA 7A 7AB 7A 7AC 7E 7AD 72 7AE 7A 7AF 78
7B0 6B 7B1 7B 7B2 3B 7B3 5B 7B4 79 7B5 FB 7B6 6F 7B7 7F
7B8 7B 7B9 7B 7BA 7A 7BB 7B 7BC 79 7BD 7B 7BE 73 7BF 7F
7C0 6C 7C1 7C 7C2 3C 7C3 5C 7C4 7E 7C5 FC 7C6 68 7C7 78
7C8 7C 7C9 7C 7CA 7D 7CB 7C 7CC 7E 7CD 7C 7CE 74 7CF 78
7D0 5D 7D1 3D 7D2 7D 7D3 6D 7D4 79 7D5 69 7D6 FD 7D7 7F
7D8 7D 7D9 7C 7DA 7D 7DB 7D 7DC 79 7DD 75 7DE 7D 7DF 7F
7E0 FE 7E1 7C 7E2 7A 7E3 6A 7E4 7E 7E5 6E 7E6 5E 7E7 3E
7E8 7E 7E9 7C 7EA 7A 7EB 76 7EC 7E 7ED 7E 7EE 7E 7EF 7F
7F0 6B 7F1 7B 7F2 7D 7F3 FF 7F4 3F 7F5 5F 7F6 6F 7F7 7F
7F8 77 7F9 7B 7FA 7D 7FB 7F 7FC 7E 7FD 7F 7FE 7F 7FF 7F
800 00 801 82 802 84 803 94 804 80 805 90 806 A0 807 C0
808 80 809 82 80A 84 80B 88 80C 80 80D 80 80E 80 80F 81
810 95 811 85 812 83 813 01 814 C1 815 A1 816 91 817 81
818 89 819 85 81A 83 81B 81 81C 80 81D 81 81E 81 81F 81
820 92 821 82 822 C2 823 A2 824 80 825 02 826 96 827 86
828 82 829 82 82A 83 82B 82 82C 80 82D 82 82E 8A 82F 86
830 A3 831 C3 832 83 833 93 834 87 835 97 836 03 837 81
838 83 839 82 83A 83 83B 83 83C 87 83D 8B 83E 83 83F 81
840 A4 841 C4 842 84 843 94 844 80 845 90 846 04 847 86
848 84 849 85 84A 84 84B 84 84C 80 84D 8C 84E 84 84F 86
850 95 851 85 852 C5 853 A5 854 87 855 05 856 91 857 81
858 85 859 85 85A 84 85B 85 85C 87 85D 85 85E 8D 85F 81
860 92 861 82 862 84 863 06 864 C6 865 A6 866 96 867 86
868 8E 869 82 86A 84 86B 86 86C 87 86D 86 86E 86 86F 86
870 07 871 85 872 83 873 93 874 87 875 97 876 A7 877 C7
878 87 879 85 87A 83 87B 8F 87C 87 87D 87 87E 87 87F 86
880 C8 881 A8 882 98 883 88 884 9C 885 8C 886 8A 887 08
888 89 889 88 88A 88 88B 88 88C 80 88D 8C 88E 8A 88F 88
890 89 891 99 892 A9 893 C9 894 09 895 8B 896 8D 897 9D
898 89 899 89 89A 89 89B 88 89C 89 89D 8B 89E 8D 89F 81
8A0 8E 8A1 9E 8A2 0A 8A3 88 8A4 AA 8A5 CA 8A6 8A 8A7 9A
8A8 8E 8A9 82 8AA 8A 8AB 88 8AC 8A 8AD 8B 8AE 8A 8AF 8A
8B0 89 8B1 0B 8B2 9F 8B3 8F 8B4 9B 8B5 8B 8B6 CB 8B7 AB
8B8 89 8B9 8B 8BA 83 8BB 8F 8BC 8B 8BD 8B 8BE 8A 8BF 8B
8C0 8E 8C1 0C 8C2 98 8C3 88 8C4 9C 8C5 8C 8C6 CC 8C7 AC
8C8 8E 8C9 8C 8CA 84 8CB 88 8CC 8C 8CD 8C 8CE 8D 8CF 8C
8D0 89 8D1 99 8D2 0D 8D3 8F 8D4 AD 8D5 CD 8D6 8D 8D7 9D
8D8 89 8D9 85 8DA 8D 8DB 8F 8DC 8D 8DD 8C 8DE 8D 8DF 8D
8E0 8E 8E1 9E 8E2 AE 8E3 CE 8E4 0E 8E5 8C 8E6 8A 8E7 9A
8E8 8E 8E9 8E 8EA 8E 8EB 8F 8EC 8E 8ED 8C 8EE 8A 8EF 86
8F0 CF 8F1 AF 8F2 9F 8F3 8F 8F4 9B 8F5 8B 8F6 8D 8F7 0F
8F8 8E 8F9 8F 8FA 8F 8FB 8F 8FC 87 8FD 8B 8FE 8D 8FF 8F
900 92 901 90 902 98 903 94 904 90 905 90 906 91 907 90
908 92 909 10 90A 84 90B 94 90C 80 90D 90 90E D0 90F B0
910 95 911 99 912 91 913 93 914 91 915 90 916 91 917 91
918 95 919 85 91A 11 91B 93 91C B1 91D D1 91E 91 91F 81

920	92	921	92	922	92	923	93	924	92	925	90	926	96	927	9A
928	92	929	82	92A	B2	92B	D2	92C	12	92D	90	92E	96	92F	66
930	92	931	93	932	93	933	93	934	9B	935	97	936	91	937	93
938	D3	939	B3	93A	83	93B	93	93C	87	93D	97	93E	91	93F	13
940	95	941	94	942	94	943	94	944	9C	945	90	946	96	947	9[illegible]
948	D4	949	B4	94A	84	94B	94	94C	80	94D	90	94E	96	94F	14
950	95	951	95	952	95	953	94	954	95	955	97	956	91	957	9D
958	95	959	85	95A	B5	95B	D5	95C	15	95D	97	95E	91	95F	81
960	92	961	9E	962	96	963	94	964	96	965	97	966	96	967	96
968	92	969	82	96A	16	96B	94	96C	B6	96D	D6	96E	96	96F	96
970	95	971	97	972	9F	973	93	974	97	975	97	976	96	977	97
978	95	979	17	97A	83	97B	93	97C	87	97D	97	97E	D7	97F	B7
980	98	981	99	982	98	983	98	984	9C	985	90	986	98	987	9A
988	B8	989	D8	98A	98	98B	88	98C	9C	98D	8C	98E	18	98F	9A
990	99	991	99	992	98	993	99	994	9B	995	99	996	91	997	9D
998	89	999	99	99A	D9	99B	B9	99C	9B	99D	19	99E	8D	99F	9D
9A0	92	9A1	9E	9A2	98	9A3	9A	9A4	9B	9A5	9A	9A6	9A	9A7	9A
9A8	8E	9A9	9E	9AA	98	9AB	1A	9AC	DA	9AD	BA	9AE	8A	9AF	9A
9B0	9B	9B1	99	9B2	9F	9B3	93	9B4	9B	9B5	9B	9B6	9B	9B7	9A
9B8	1B	9B9	99	9BA	9F	9BB	8F	9BC	9B	9BD	8B	9BE	BB	9BF	DB
9C0	9C	9C1	9E	9C2	98	9C3	94	9C4	9C	9C5	9C	9C6	9C	9C7	9D
9C8	1C	9C9	9E	9CA	98	9CB	88	9CC	9C	9CD	8C	9CE	BC	9CF	DC
9D0	95	9D1	99	9D2	9F	9D3	9D	9D4	9C	9D5	9D	9D6	9D	9D7	9D
9D8	89	9D9	99	9DA	9F	9DB	1D	9DC	DD	9DD	BD	9DE	8D	9DF	9D
9E0	9E	9E1	9E	9E2	9F	9E3	9E	9E4	9C	9E5	9E	9E6	96	9E7	9A
9E8	8E	9E9	9E	9EA	DE	9EB	BE	9EC	9C	9ED	1E	9EE	8A	9EF	9A
9F0	9F	9F1	9E	9F2	9F	9F3	9F	9F4	9B	9F5	97	9F6	9F	9F7	9D
9F8	BF	9F9	DF	9FA	9F	9FB	8F	9FC	9B	9FD	8B	9FE	1F	9FF	9D
A00	A4	A01	A8	A02	A0	A03	A2	A04	A0	A05	A1	A06	A0	A07	A0
A08	A4	A09	B4	A0A	20	A0B	A2	A0C	80	A0D	E0	A0E	A0	A0F	B0
A10	A3	A11	A1	A12	A9	A13	A5	A14	A1	A15	A1	A16	A0	A17	A1
A18	A3	A19	21	A1A	B5	A1B	A5	A1C	B1	A1D	A1	A1E	E1	A1F	81
A20	A3	A21	A2	A22	A2	A23	A2	A24	AA	A25	A6	A26	A0	A27	A2
A28	E2	A29	82	A2A	B2	A2B	A2	A2C	B6	A2D	A6	A2E	A0	A2F	22
A30	A3	A31	A3	A32	A3	A33	A2	A34	A3	A35	A1	A36	A7	A37	A3
A38	A3	A39	B3	A3A	83	A3B	E3	A3C	23	A3D	A1	A3E	A7	A3F	B7
A40	A4	A41	A4	A42	A4	A43	A5	A44	A4	A45	A6	A46	A0	A47	AC
A48	A4	A49	B4	A4A	84	A4B	E4	A4C	24	A4D	A6	A4E	A0	A4F	B0
A50	A4	A51	A5	A52	A5	A53	A5	A54	AD	A55	A1	A56	A7	A57	A5
A58	E5	A59	85	A5A	B5	A5B	A5	A5C	B1	A5D	A1	A5E	A7	A5F	25
A60	A4	A61	A6	A62	AE	A63	A2	A64	A6	A65	A6	A66	A7	A67	A6
A68	A4	A69	26	A6A	B2	A6B	A2	A6C	B6	A6D	A6	A6E	E6	A6F	66
A70	A3	A71	AF	A72	A7	A73	A5	A74	A7	A75	A6	A76	A7	A77	A7
A78	A3	A79	B3	A7A	27	A7B	A5	A7C	87	A7D	E7	A7E	A7	A7F	B7
A80	A8	A81	A8	A82	A9	A83	A8	A84	AA	A85	A8	A86	A0	A87	AC
A88	B8	A89	A8	A8A	E8	A8B	88	A8C	AA	A8D	28	A8E	BC	A8F	AC
A90	A9	A91	A8	A92	A9	A93	A9	A94	AD	A95	A1	A96	A9	A97	AB
A98	89	A99	E9	A9A	A9	A9B	B9	A9C	AD	A9D	BD	A9E	29	A9F	AB
AA0	AA	AA1	A8	AA2	AE	AA3	A2	AA4	AA	AA5	AA	AA6	AA	AA7	AB
AA8	2A	AA9	A8	AAA	AE	AAB	BE	AAC	AA	AAD	BA	AAE	8A	AAF	EA
AB0	A3	AB1	AF	AB2	A9	AB3	AB	AB4	AA	AB5	AB	AB6	AB	AB7	AB
AB8	BF	AB9	AF	ABA	A9	ABB	2B	ABC	EB	ABD	8B	ABE	BB	ABF	AB
AC0	A4	AC1	A8	AC2	AE	AC3	AC	AC4	AD	AC5	AC	AC6	AC	AC7	AC
AC8	B8	AC9	A8	ACA	AE	ACB	2C	ACC	EC	ACD	8C	ACE	BC	ACF	AC
AD0	AD	AD1	AF	AD2	A9	AD3	A5	AD4	AD	AD5	AD	AD6	AD	AD7	AC
AD8	2D	AD9	AF	ADA	A9	ADB	B9	ADC	AD	ADD	BD	ADE	8D	ADF	ED
AE0	AE	AE1	AF	AE2	AE	AE3	AE	AE4	AA	AE5	A6	AE6	AE	AE7	AC
AE8	8E	AE9	EE	AEA	AE	AEB	BE	AEC	AA	AED	BA	AEE	2E	AEF	AC
AF0	AF	AF1	AF	AF2	AE	AF3	AF	AF4	AD	AF5	AF	AF6	A7	AF7	AB
AF8	BF	AF9	AF	AFA	EF	AFB	8F	AFC	AD	AFD	2F	AFE	BB	AFF	AB

```
B00 A4   B01 B4   B02 B2   B03 30   B04 F0   B05 90   B06 A0   B07 B0
B08 B8   B09 B4   B0A B2   B0B B0   B0C B1   B0D B0   B0E B0   B0F B0
B10 31   B11 B3   B12 B5   B13 A5   B14 B1   B15 A1   B16 91   B17 F1
B18 B1   B19 B3   B1A B5   B1B B9   B1C B1   B1D B1   B1E B1   B1F B0
B20 92   B21 F2   B22 B2   B23 A2   B24 B6   B25 A6   B26 32   B27 B0
B28 B2   B29 B3   B2A B2   B2B B2   B2C B6   B2D B4   B2E B2   B2F B0
B30 A3   B31 B3   B32 F3   B33 93   B34 B1   B35 33   B36 A7   B37 B7
B38 B3   B39 B3   B3A B2   B3B B3   B3C B1   B3D B3   B3E BB   B3F B7
B40 A4   B41 B4   B42 F4   B43 94   B44 B6   B45 34   B46 A0   B47 B0
B48 B4   B49 B4   B4A B5   B4B B4   B4C B6   B4D B4   B4E BC   B4F B0
B50 95   B51 F5   B52 B5   B53 A5   B54 B1   B55 A1   B56 35   B57 B7
B58 B5   B59 B4   B5A B5   B5B B5   B5C B1   B5D BD   B5E B5   B5F B7
B60 36   B61 B4   B62 B2   B63 A2   B64 B6   B65 A6   B66 96   B67 F6
B68 B6   B69 B4   B6A B2   B6B BE   B6C B6   B6D B6   B6E B6   B6F B7
B70 A3   B71 B3   B72 B5   B73 37   B74 F7   B75 97   B76 A7   B77 B7
B78 BF   B79 B3   B7A B5   B7B B7   B7C B6   B7D B7   B7E B7   B7F B7
B80 B8   B81 A8   B82 98   B83 F8   B84 38   B85 BA   B86 BC   B87 AC
B88 B8   B89 B8   B8A B8   B8B B9   B8C B8   B8D BA   B8E BC   B8F B0
B90 F9   B91 99   B92 A9   B93 B9   B94 AD   B95 BD   B96 BB   B97 39
B98 B8   B99 B9   B9A B9   B9B B9   B9C B1   B9D BD   B9E BB   B9F B9
BA0 B8   BA1 3A   BA2 AE   BA3 BE   BA4 AA   BA5 BA   BA6 FA   BA7 9A
BA8 B8   BA9 3A   BAA B2   BAB BE   BAC BA   BAD BA   BAE BB   BAF BA
BB0 BF   BB1 AF   BB2 3B   BB3 B9   BB4 9B   BB5 FB   BB6 BB   BB7 AB
BB8 BF   BB9 B3   BBA BB   BBB B9   BBC BB   BBD BA   BBE BB   BBF BB
BC0 B8   BC1 A8   BC2 3C   BC3 BE   BC4 9C   BC5 FC   BC6 BC   BC7 AC
BC8 B8   BC9 B4   BCA BC   BCB BE   BCC BC   BCD BD   BCE BC   BCF BC
BD0 BF   BD1 3D   BD2 A9   BD3 B9   BD4 AD   BD5 BD   BD6 FD   BD7 9D
BD8 BF   BD9 BD   BDA B5   BDB B9   BDC BD   BDD BD   BDE BC   BDF BD
BE0 FE   BE1 9E   BE2 AE   BE3 BE   BE4 AA   BE5 BA   BE6 BC   BE7 3E
BE8 BF   BE9 BE   BEA BE   BEB BE   BEC B6   BED BA   BEE BC   BEF BE
BF0 BF   BF1 AF   BF2 9F   BF3 FF   BF4 3F   BF5 BD   BF6 BB   BF7 AB
BF8 BF   BF9 BF   BFA BF   BFB BE   BFC BF   BFD BD   BFE BB   BFF B7
C00 C8   C01 C4   C02 C2   C03 C0   C04 C1   C05 C0   C06 C0   C07 C0
C08 D4   C09 C4   C0A C2   C0B 40   C0C 80   C0D E0   C0E D0   C0F C0
C10 C1   C11 C3   C12 C5   C13 C9   C14 C1   C15 C1   C16 C1   C17 C0
C18 41   C19 C3   C1A C5   C1B D5   C1C C1   C1D D1   C1E E1   C1F 81
C20 C2   C21 C3   C22 C2   C23 C2   C24 C6   C25 CA   C26 C2   C27 C0
C28 E2   C29 82   C2A C2   C2B D2   C2C C6   C2D D6   C2E 42   C2F C0
C30 C3   C31 C3   C32 C2   C33 C3   C34 C1   C35 C3   C36 CB   C37 C7
C38 D3   C39 C3   C3A 83   C3B E3   C3C C1   C3D 43   C3E D7   C3F C7
C40 C4   C41 C4   C42 C5   C43 C4   C44 C6   C45 C4   C46 CC   C47 C0
C48 D4   C49 C4   C4A 84   C4B E4   C4C C6   C4D 44   C4E D0   C4F C0
C50 C5   C51 C4   C52 C5   C53 C5   C54 C1   C55 CD   C56 C5   C57 C7
C58 E5   C59 85   C5A C5   C5B D5   C5C C1   C5D D1   C5E 45   C5F C7
C60 C6   C61 C4   C62 C2   C63 CE   C64 C6   C65 C6   C66 C6   C67 C7
C68 46   C69 C4   C6A C2   C6B D2   C6C C6   C6D D6   C6E E6   C6F 86
C70 CF   C71 C3   C72 C5   C73 C7   C74 C6   C75 C7   C76 C7   C77 C7
C78 D3   C79 C3   C7A C5   C7B 47   C7C 87   C7D D7   C7E D7   C7F C7
C80 C8   C81 C8   C82 C8   C83 C9   C84 C8   C85 CA   C86 CC   C87 C0
C88 C8   C89 D8   C8A E8   C8B 88   C8C 48   C8D CA   C8E CC   C8F DC
C90 C8   C91 C9   C92 C9   C93 C9   C94 C1   C95 CD   C96 CB   C97 C9
C98 89   C99 E9   C9A D9   C9B C9   C9C DD   C9D CD   C9E CB   C9F 49
CA0 C8   CA1 CA   CA2 C2   CA3 CE   CA4 CA   CA5 CA   CA6 CB   CA7 CA
CA8 C8   CA9 4A   CAA DE   CAB CE   CAC DA   CAD CA   CAE 8A   CAF CA
CB0 CF   CB1 C3   CB2 CB   CB3 C9   CB4 CB   CB5 CA   CB6 CB   CB7 C3
CB8 CF   CB9 DF   CBA 4B   CBB C9   CBC EB   CBD 8B   CBE CB   CBF D3
CC0 C8   CC1 C4   CC2 CC   CC3 CE   CC4 CC   CC5 CD   CC6 CC   CC7 CC
CC8 C8   CC9 D8   CCA 4C   CCB CE   CCC DC   CCD 8C   CCE CC   CCF DC
CD0 CF   CD1 CD   CD2 C5   CD3 C9   CD4 CD   CD5 CD   CD6 CC   CD7 CD
CD8 CF   CD9 4D   CDA D9   CDB C9   CDC DD   CDD CD   CDE 8D   CDF CD
```

```
CE0 CF   CE1 CE   CE2 CE   CE3 CE   CE4 C6   CE5 CA   CE6 CC   CE7 CE
CE8 8E   CE9 EE   CEA DE   CEB CE   CEC DA   CED CA   CEE CC   CEF 4E
CF0 CF   CF1 CF   CF2 CF   CF3 CE   CF4 CF   CF5 CD   CF6 CB   CF7 C7
CF8 CF   CF9 DF   CFA EF   CFB 8F   CFC 4F   CFD CD   CFE CB   CFF DB
D00 D4   D01 C4   D02 50   D03 D2   D04 F0   D05 90   D06 D0   D07 C0
D08 D4   D09 D8   D0A D0   D0B D2   D0C D0   D0D D1   D0E D0   D0F D0
D10 D3   D11 51   D12 C5   D13 D5   D14 C1   D15 D1   D16 91   D17 F1
D18 D3   D19 D1   D1A D9   D1B D5   D1C D1   D1D D1   D1E D0   D1F D1
D20 92   D21 F2   D22 C2   D23 D2   D24 C6   D25 D6   D26 D0   D27 52
D28 D3   D29 D2   D2A D2   D2B D2   D2C DA   D2D D6   D2E D0   D2F D2
D30 D3   D31 C3   D32 F3   D33 93   D34 53   D35 D1   D36 D7   D37 C7
D38 D3   D39 D3   D3A D3   D3B D2   D3C D3   D3D D1   D3E D7   D3F DB
D40 D4   D41 C4   D42 F4   D43 94   D44 54   D45 D6   D46 D0   D47 C0
D48 D4   D49 D4   D4A D4   D4B D5   D4C D4   D4D D6   D4E D0   D4F DC
D50 95   D51 F5   D52 C5   D53 D5   D54 C1   D55 D1   D56 D7   D57 55
D58 D4   D59 D5   D5A D5   D5B D5   D5C DD   D5D D1   D5E D7   D5F D5
D60 D4   D61 56   D62 C2   D63 D2   D64 C6   D65 D6   D66 96   D67 F6
D68 D4   D69 D6   D6A DE   D6B D2   D6C D6   D6D D6   D6E D7   D6F D6
D70 D3   D71 C3   D72 57   D73 D5   D74 F7   D75 97   D76 D7   D77 C7
D78 D3   D79 DF   D7A D7   D7B D5   D7C D7   D7D D6   D7E D7   D7F D7
D80 C8   D81 D8   D82 98   D83 F8   D84 DA   D85 58   D86 CC   D87 DC
D88 D8   D89 D8   D8A D9   D8B D8   D8C DA   D8D D8   D8E D0   D8F DC
D90 F9   D91 99   D92 D9   D93 C9   D94 DD   D95 CD   D96 59   D97 DB
D98 D9   D99 D8   D9A D9   D9B D9   D9C DD   D9D D1   D9E D9   D9F DB
DA0 5A   DA1 D8   DA2 DE   DA3 CE   DA4 DA   DA5 CA   DA6 FA   DA7 9A
DA8 DA   DA9 D8   DAA DE   DAB D2   DAC DA   DAD DA   DAE DA   DAF DB
DB0 CF   DB1 DF   DB2 D9   DB3 5B   DB4 9B   DB5 FB   DB6 CB   DB7 DB
DB8 D3   DB9 DF   DBA D9   DBB DB   DBC DA   DBD DB   DBE DB   DBF DB
DC0 C8   DC1 D8   DC2 DE   DC3 5C   DC4 9C   DC5 FC   DC6 CC   DC7 DC
DC8 D4   DC9 D8   DCA DE   DCB DC   DCC DD   DCD DC   DCE DC   DCF DC
DD0 5D   DD1 DF   DD2 D9   DD3 C9   DD4 DD   DD5 CD   DD6 FD   DD7 9D
DD8 DD   DD9 DF   DDA D9   DDB D5   DDC DD   DDD DD   DDE DD   DDF DC
DE0 FE   DE1 9E   DE2 DE   DE3 CE   DE4 DA   DE5 CA   DE6 5E   DE7 DC
DE8 DE   DE9 DF   DEA DE   DEB DE   DEC DA   DED D6   DEE DE   DEF DC
DF0 CF   DF1 DF   DF2 9F   DF3 FF   DF4 DD   DF5 5F   DF6 CB   DF7 DB
DF8 DF   DF9 DF   DFA DE   DFB DF   DFC DD   DFD DF   DFE D7   DFF DB
E00 E2   E01 60   E02 F4   E03 E4   E04 F0   E05 E0   E06 A0   E07 C0
E08 E2   E09 E0   E0A E8   E0B E4   E0C E0   E0D E0   E0E E1   E0F E0
E10 E5   E11 F5   E12 61   E13 E3   E14 C1   E15 A1   E16 E1   E17 F1
E18 E5   E19 E9   E1A E1   E1B E3   E1C E1   E1D E0   E1E E1   E1F E1
E20 E2   E21 F2   E22 C2   E23 A2   E24 62   E25 E0   E26 E6   E27 F6
E28 E2   E29 E2   E2A E2   E2B E3   E2C E2   E2D E0   E2E E6   E2F EA
E30 A3   E31 C3   E32 F3   E33 E3   E34 F7   E35 E7   E36 E1   E37 63
E38 E2   E39 E3   E3A E3   E3B E3   E3C EB   E3D E7   E3E E1   E3F E3
E40 A4   E41 C4   E42 F4   E43 E4   E44 F0   E45 E0   E46 E6   E47 64
E48 E5   E49 E4   E4A E4   E4B E4   E4C EC   E4D E0   E4E E6   E4F E4
E50 E5   E51 F5   E52 C5   E53 A5   E54 65   E55 E7   E56 E1   E57 F1
E58 E5   E59 E5   E5A E5   E5B E4   E5C E5   E5D E7   E5E E1   E5F ED
E60 E2   E61 F2   E62 66   E63 E4   E64 C6   E65 A6   E66 E6   E67 F6
E68 E2   E69 EE   E6A E6   E6B E4   E6C E6   E6D E7   E6E E6   E6F E6
E70 E5   E71 67   E72 F3   E73 E3   E74 F7   E75 E7   E76 A7   E77 C7
E78 E5   E79 E7   E7A EF   E7B E3   E7C E7   E7D E7   E7E E6   E7F E7
E80 C8   E81 A8   E82 E8   E83 F8   E84 EC   E85 FC   E86 68   E87 EA
E88 E8   E89 E9   E8A E8   E8B E8   E8C EC   E8D E0   E8E E8   E8F EA
E90 F9   E91 E9   E92 A9   E93 C9   E94 EB   E95 69   E96 FD   E97 ED
E98 E9   E99 E9   E9A E8   E9B E9   E9C EB   E9D E9   E9E E1   E9F ED
EA0 FE   EA1 EE   EA2 E8   EA3 6A   EA4 AA   EA5 CA   EA6 FA   EA7 EA
EA8 E2   EA9 EE   EAA E8   EAB EA   EAC EB   EAD EA   EAE EA   EAF EA
EB0 6B   EB1 E9   EB2 EF   EB3 FF   EB4 EB   EB5 FB   EB6 CB   EB7 AB
EB8 EB   EB9 E9   EBA EF   EBB E3   EBC EB   EBD EB   EBE EB   EBF EA
```

EC0 6C	EC1 EE	EC2 E8	EC3 F8	EC4 EC	EC5 FC	EC6 CC	EC7 AC
EC8 EC	EC9 EE	ECA E8	ECB E4	ECC EC	ECD EC	ECE EC	ECF ED
ED0 F9	ED1 E9	ED2 EF	ED3 6D	ED4 AD	ED5 CD	ED6 FD	ED7 ED
ED8 E5	ED9 E9	EDA EF	EDB ED	EDC EC	EDD ED	EDE ED	EDF ED
EE0 FE	EE1 EE	EE2 AE	EE3 CE	EE4 EC	EE5 6E	EE6 FA	EE7 EA
EE8 EE	EE9 EE	EEA EF	EEB EE	EEC EC	EED EE	EEE E6	EEF EA
EF0 CF	EF1 AF	EF2 EF	EF3 FF	EF4 EB	EF5 FB	EF6 6F	EF7 EE
EF8 EF	EF9 EE	EFA EF	EFB EF	EFC EB	EFD E7	EFE EF	EFF ED
F00 F0	F01 F2	F02 F4	F03 F8	F04 F0	F05 F0	F06 F0	F07 F1
F08 70	F09 F2	F0A F4	F0B E4	F0C F0	F0D E0	F0E D0	F0F B0
F10 F9	F11 F5	F12 F3	F13 F1	F14 F0	F15 F1	F16 F1	F17 F1
F18 E5	F19 F5	F1A F3	F1B 71	F1C B1	F1D D1	F1E E1	F1F F1
F20 F2	F21 F2	F22 F3	F23 F2	F24 F0	F25 F2	F26 FA	F27 F6
F28 E2	F29 F2	F2A B2	F2B D2	F2C F0	F2D 72	F2E E6	F2F F6
F30 F3	F31 F2	F32 F3	F33 F3	F34 F7	F35 FB	F36 F3	F37 F1
F38 D3	F39 B3	F3A F3	F3B E3	F3C F7	F3D E7	F3E 73	F3F F1
F40 F4	F41 F5	F42 F4	F43 F4	F44 F0	F45 FC	F46 F4	F47 F6
F48 D4	F49 B4	F4A F4	F4B E4	F4C F0	F4D E0	F4E 74	F4F F6
F50 F5	F51 F5	F52 F4	F53 F5	F54 F7	F55 F5	F56 FD	F57 F1
F58 E5	F59 F5	F5A B5	F5B D5	F5C F7	F5D 75	F5E E1	F5F F1
F60 FE	F61 F2	F62 F4	F63 F6	F64 F7	F65 F6	F66 F6	F67 F6
F68 E2	F69 F2	F6A F4	F6B 76	F6C B6	F6D D6	F6E E7	F6F F6
F70 F7	F71 F5	F72 F3	F73 FF	F74 F7	F75 F7	F76 F7	F77 F6
F78 77	F79 F5	F7A F3	F7B E3	F7C F7	F7D E7	F7E D7	F7F B7
F80 F9	F81 F8	F82 F8	F83 F8	F84 F0	F85 FC	F86 FA	F87 F8
F88 B8	F89 D8	F8A E8	F8B F8	F8C EC	F8D FC	F8E FA	F8F 78
F90 F9	F91 F9	F92 F9	F93 F8	F94 F9	F95 FB	F96 FD	F97 F1
F98 F9	F99 E9	F9A D9	F9B B9	F9C 79	F9D FB	F9E FD	F9F ED
FA0 FE	FA1 F2	FA2 FA	FA3 F8	FA4 FA	FA5 FB	FA6 FA	FA7 FA
FA8 FE	FA9 EE	FAA 7A	FAB F8	FAC DA	FAD BA	FAE FA	FAF EA
FB0 F9	FB1 FB	FB2 F3	FB3 FF	FB4 FB	FB5 FB	FB6 FA	FB7 FB
FB8 F9	FB9 7B	FBA EF	FBB FF	FBC EB	FBD FB	FBE BB	FBF DB
FC0 FE	FC1 FC	FC2 F4	FC3 F8	FC4 FC	FC5 FC	FC6 FD	FC7 FC
FC8 FE	FC9 7C	FCA E8	FCB F8	FCC EC	FCD FC	FCE BC	FCF DC
FD0 F9	FD1 F5	FD2 FD	FD3 FF	FD4 FD	FD5 FC	FD6 FD	FD7 FD
FD8 F9	FD9 E9	FDA 7D	FDB FF	FDC DD	FDD BD	FDE FD	FDF ED
FE0 FE	FE1 FE	FE2 FE	FE3 FF	FE4 FE	FE5 FC	FE6 FA	FE7 F6
FE8 FE	FE9 EE	FEA DE	FEB BE	FEC 7E	FED FC	FEE FA	FEF EA
FF0 FE	FF1 FF	FF2 FF	FF3 FF	FF4 F7	FF5 FB	FF6 FD	FF7 FF
FF8 BF	FF9 DF	FFA EF	FFB FF	FFC EB	FFD FB	FFE FD	FFF 7F

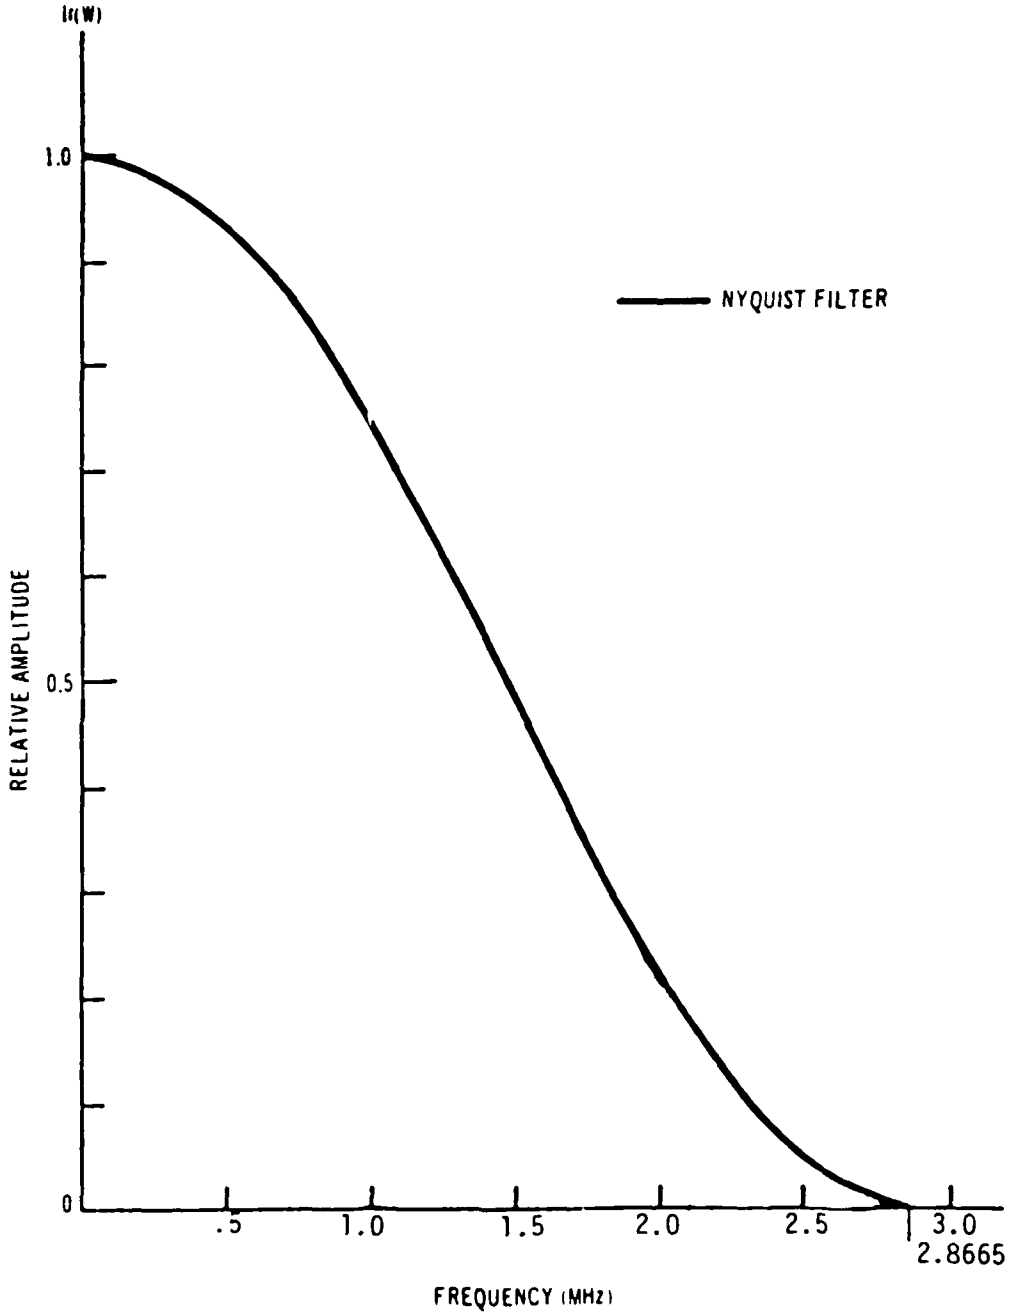

Figure 8-5. Data Spectrum After 100% Roll-Off Nyquist Filter.